



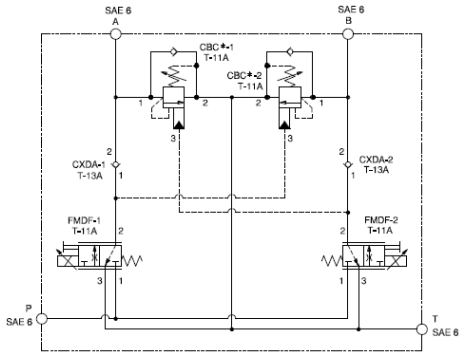

**TECHNICAL DATA**



**CONFIGURATION**

|          |  |
|----------|--|
| <b>L</b> |  |
| <b>H</b> | 1000 - 4000 psi 25 psi (70 - 280 bar 1.7 bar), 3000 psi (210 bar)                                    |
| <b>N</b> |  |
| <b>A</b> | Pilot Ratio (4th Letter) of Primary Cartridge: 3:1 (with CBCA primary cartridge, 3:1, )              |
| <b>I</b> | Port and Material Designation: Ports A, B, P, T — SAE 6; Mtg Holes — .312 - 18UNC x .56 DP; Aluminum |
|          | Coil   |

**CONFIGURATION OPTIONS**

**Model Code Example: XCCLLHNAI**

|          | (L) | (H)  | (N)      |
|----------|-----|--|----------|
| <b>L</b> |     | <b>H</b>   | <b>N</b> |
| <b>C</b> | -   | 1000 - 4000 psi 25 psi (70 - 280 bar 1.1), 3000 psi (210 bar)    | <b>V</b> |
|          |     | <b>A</b>   |          |
|          |     | 1000 - 4000 psi 4 psi (70 - 280 bar 0.3 bar), 3000 psi (210 bar) |          |
|          |     | <b>B</b>   |          |
|          |     | 400 - 1500 psi 4 psi (28 - 105 bar 0.3 bar), 1000 psi (70 bar)   |          |
|          |     | <b>I</b>   |          |
|          |     | 400 - 1500 psi 25 psi (28 - 105 bar 1.7 bar), 1000 psi (70 bar)  |          |

**PRIMARY CARTRIDGE**

(A)

|          |   |
|----------|---|
| <b>A</b> | 3:1 (with CBCA primary cartridge, 3:1, )      |
| <b>B</b> | 1.5:1 (with CBCBX primary cartridge, 1.5:1, ) |
| <b>G</b> | 4.5:1 (with CBCGX primary cartridge, 4.5:1, ) |
| <b>A</b> | 3:1 (with CBCAX primary cartridge, 3:1, )     |
| <b>G</b> | 4.5:1 (with CBCG primary cartridge, 4.5:1, )  |
| <b>B</b> | 1.5:1 (with CBCB primary cartridge, 1.5:1, )  |

**INCLUDED COMPONENTS**

| Part    | Description         | Quantity |
|---------|---------------------|----------|
| CBCALHN | Cartridge - Primary | 2        |
| CXDAXCN | Cartridge           | 2        |
| FMDFMDN | Cartridge           | 2        |