
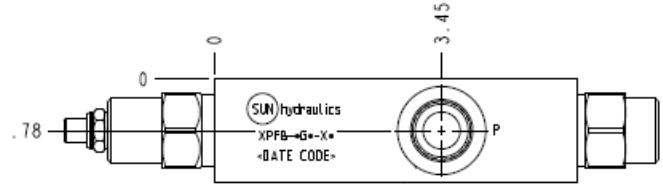


DIMENSIONS ARE IN INCHES

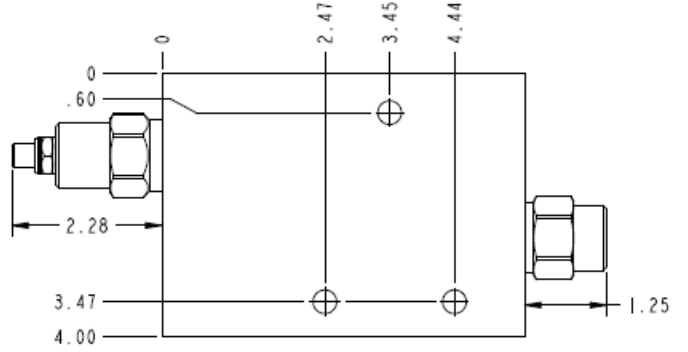

**CONFIGURATION OPTIONS**

Model Code Example: XPFBLGNX

CONTROL	(L) MAXIMUM ORIFICE DIAMETER	(G) SEAL MATERIAL	(N)
L Standard Screw Adjustment	G .5 in. (12,7 mm)	N Buna-N	
		V Viton	
PRIMARY CARTRIDGE			(X)
X (with NFDD primary cartridge, Totalmente ajustable aguja válvula )			