
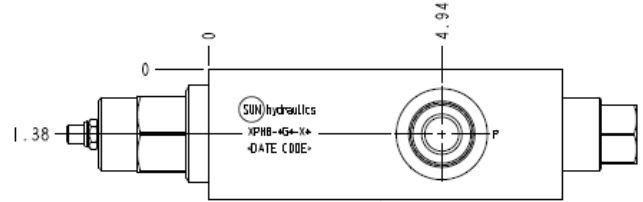
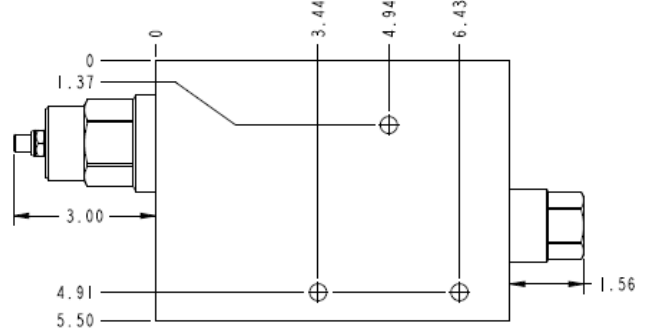


DIMENSIONS ARE IN INCHES



CONFIGURATION OPTIONS

Model Code Example: XPHBLGNX

CONTROL	(L)	MAXIMUM ORIFICE DIAMETER	(G)	SEAL MATERIAL	(N)
L	Standard Screw Adjustment	G	.56 in. (14,2 mm)	N	Buna-N
			V	Viton	
PRIMARY CARTRIDGE					(X)
X	X (with NFFC primary cartridge, Totalmente ajustable aguja válvula)				