

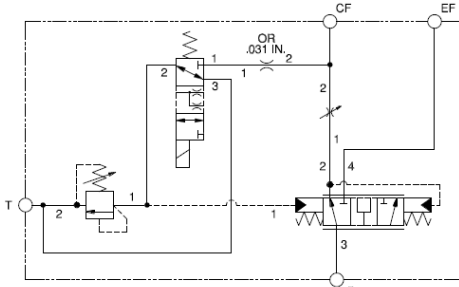


A - Normally Open 1 to 2

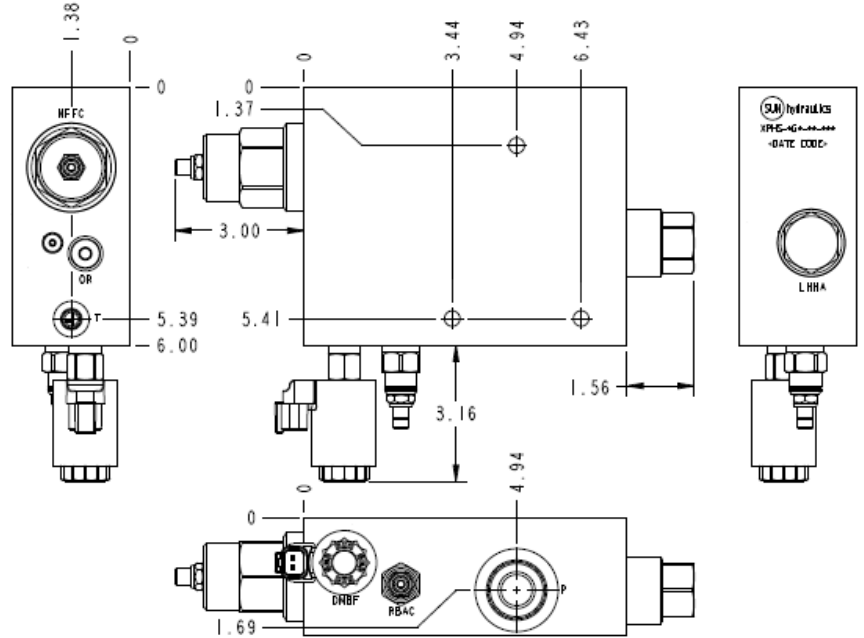

N - Normally Open 2 to 3

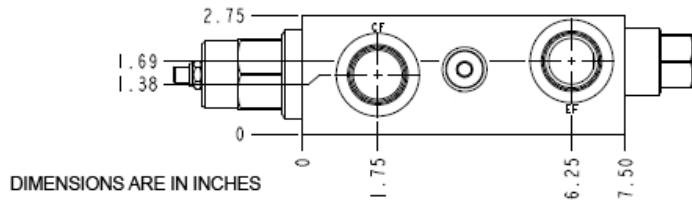

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Body Type	montaje en línea
Capacity	240 L/min.
Mounting Hole Diameter	9,1 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	3

**OPTION SELECTION EXAMPLE: XPHSLGNNM**

CONTROL	(L) MAXIMUM ORIFICE DIAMETER	(G) SEAL MATERIAL	(N)
<b>L</b> Standard Screw Adjustment	<b>G</b> .56 in. (14.2 mm)	<b>N</b> Buna-N	
K manilla		V Viton	

**INCLUDED COMPONENTS**


Part	Description	Quantity
280-039-031*	Orifice	1
A330-006-002*	SAE Plug	1
A330-006-006*	SAE Plug	1
A330-006-010*	SAE Plug	1
DMBFXNN	Cartridge	1
LHHAXFN	Cartridge	1
NFFCLGN	Cartridge - Primary	1
RBACLAN	Cartridge	1

**MANIFOLD FACES**


**FACE GRID**

1	2	3	4
5	6	7	8
9	10	11	12


### FACE 2

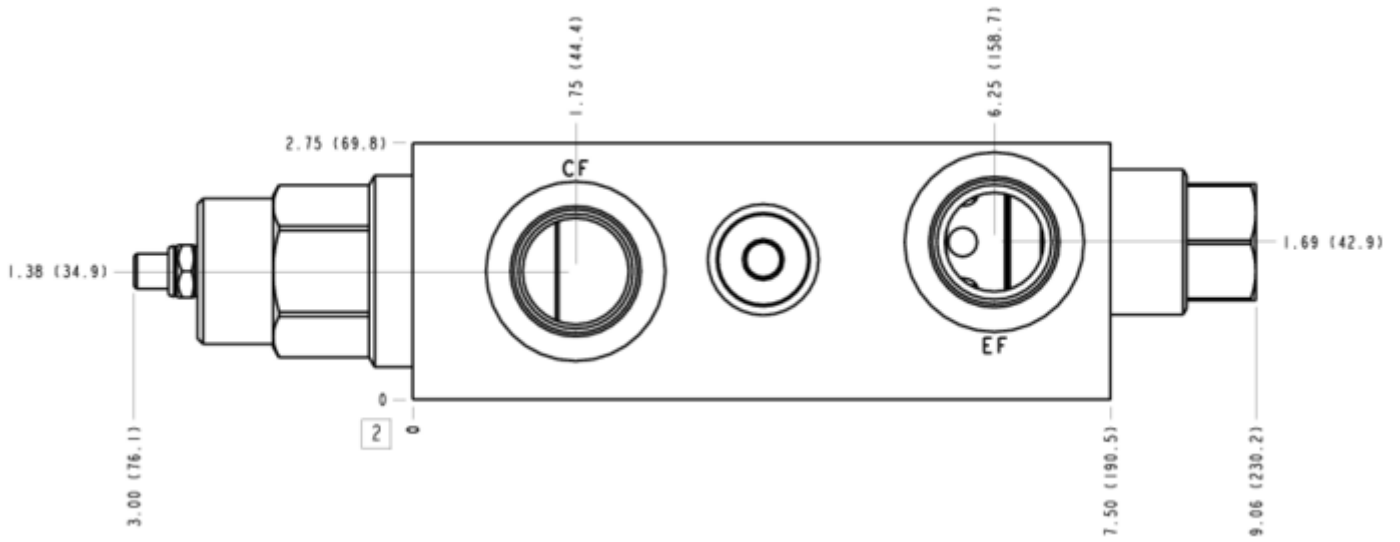


### FACE 5

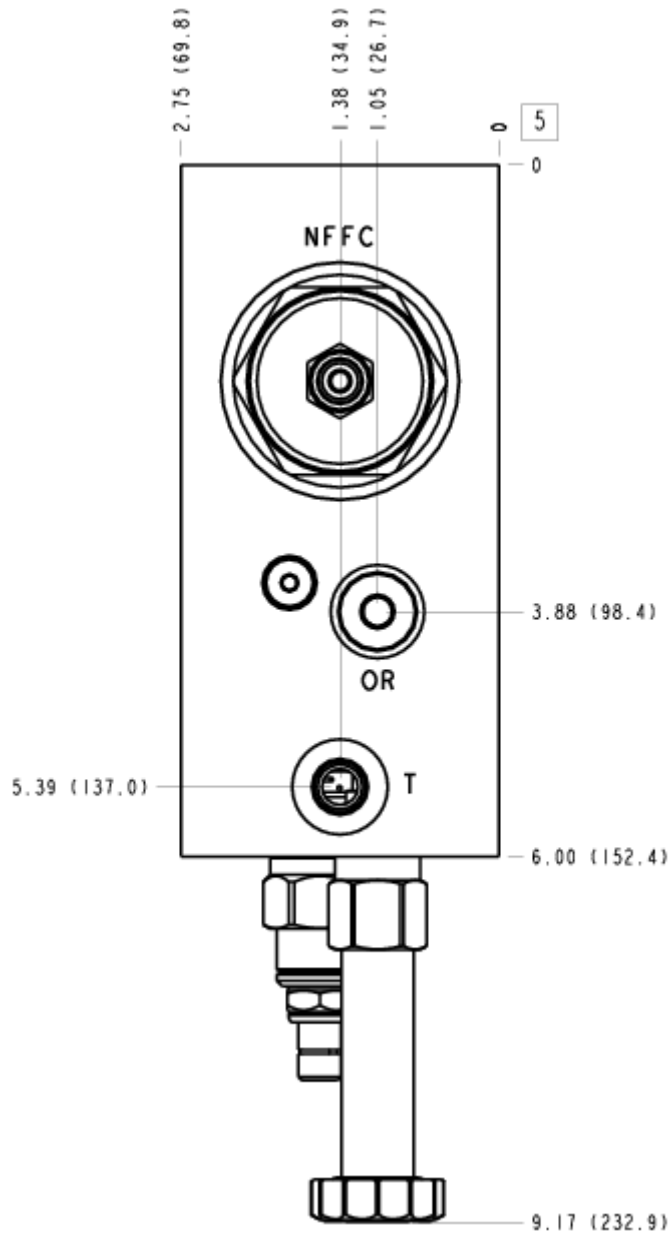


FACE 6

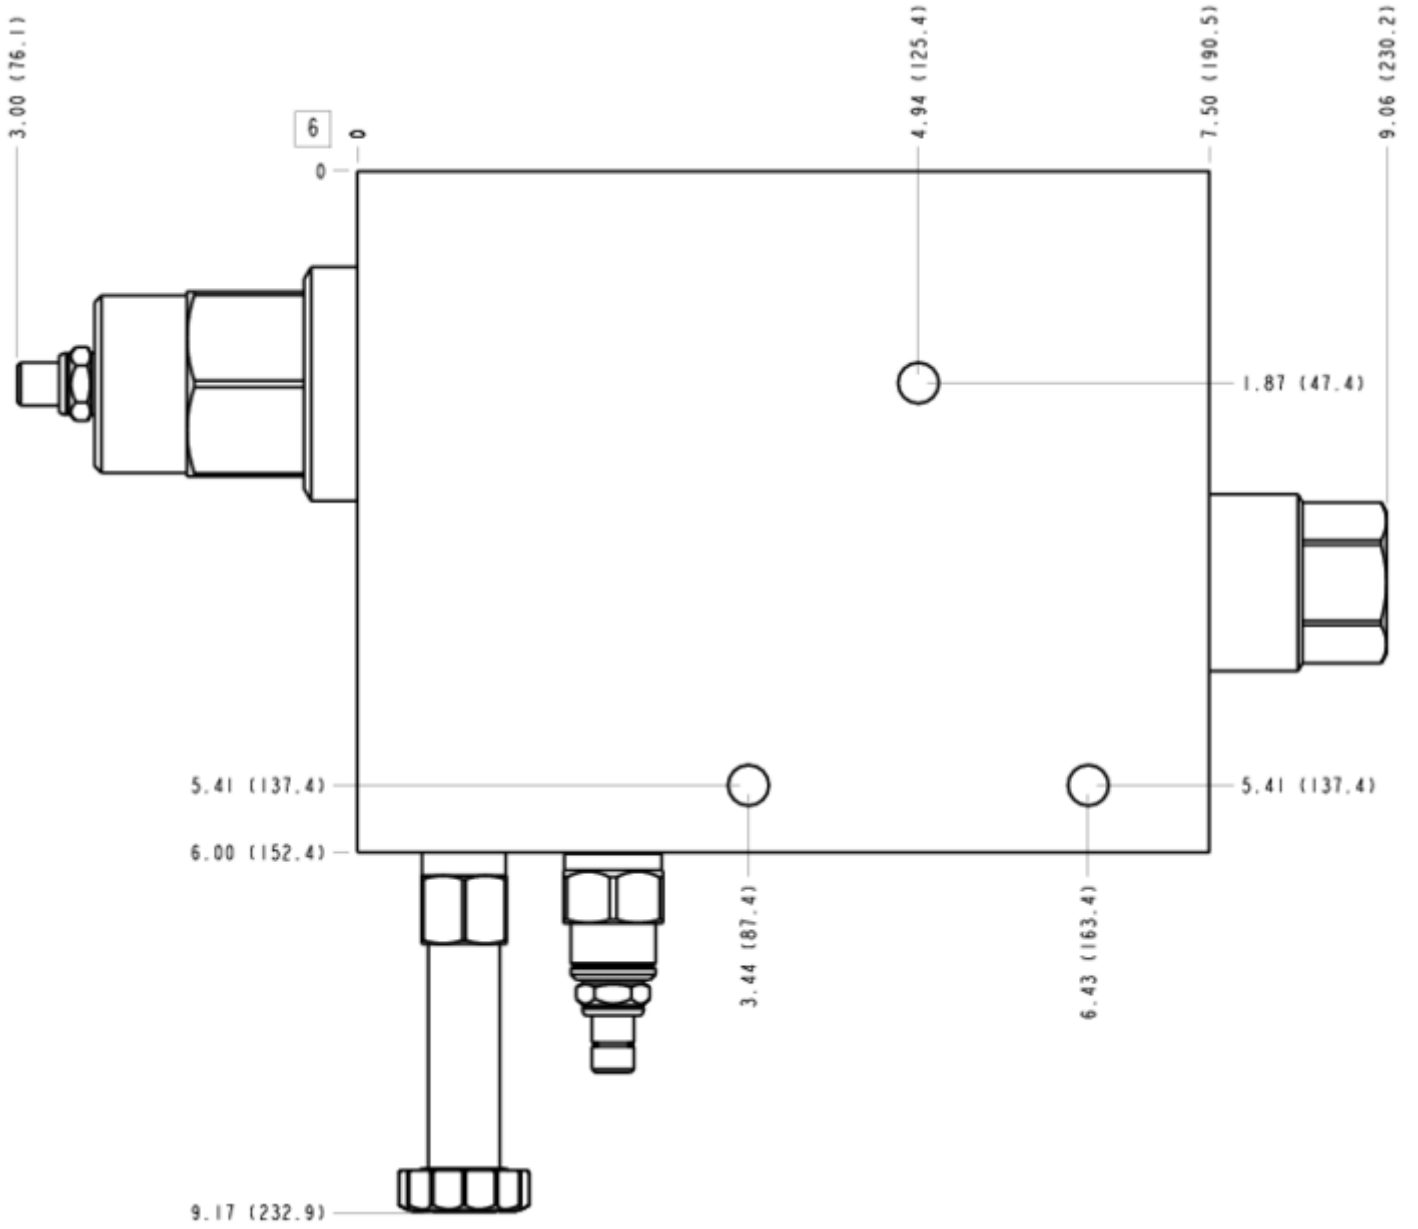

FACE 7

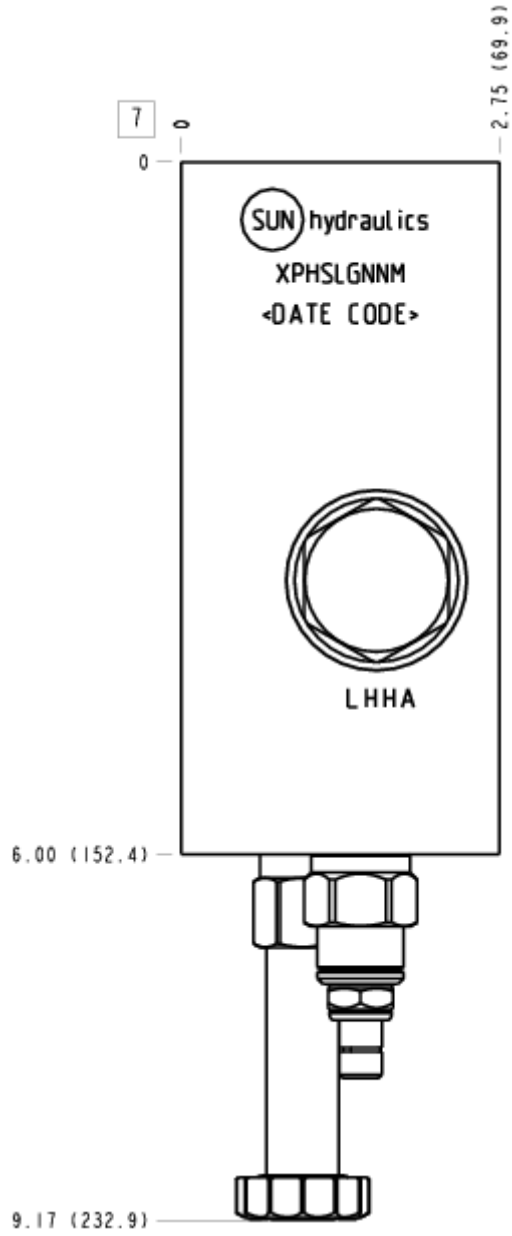

FACE 8

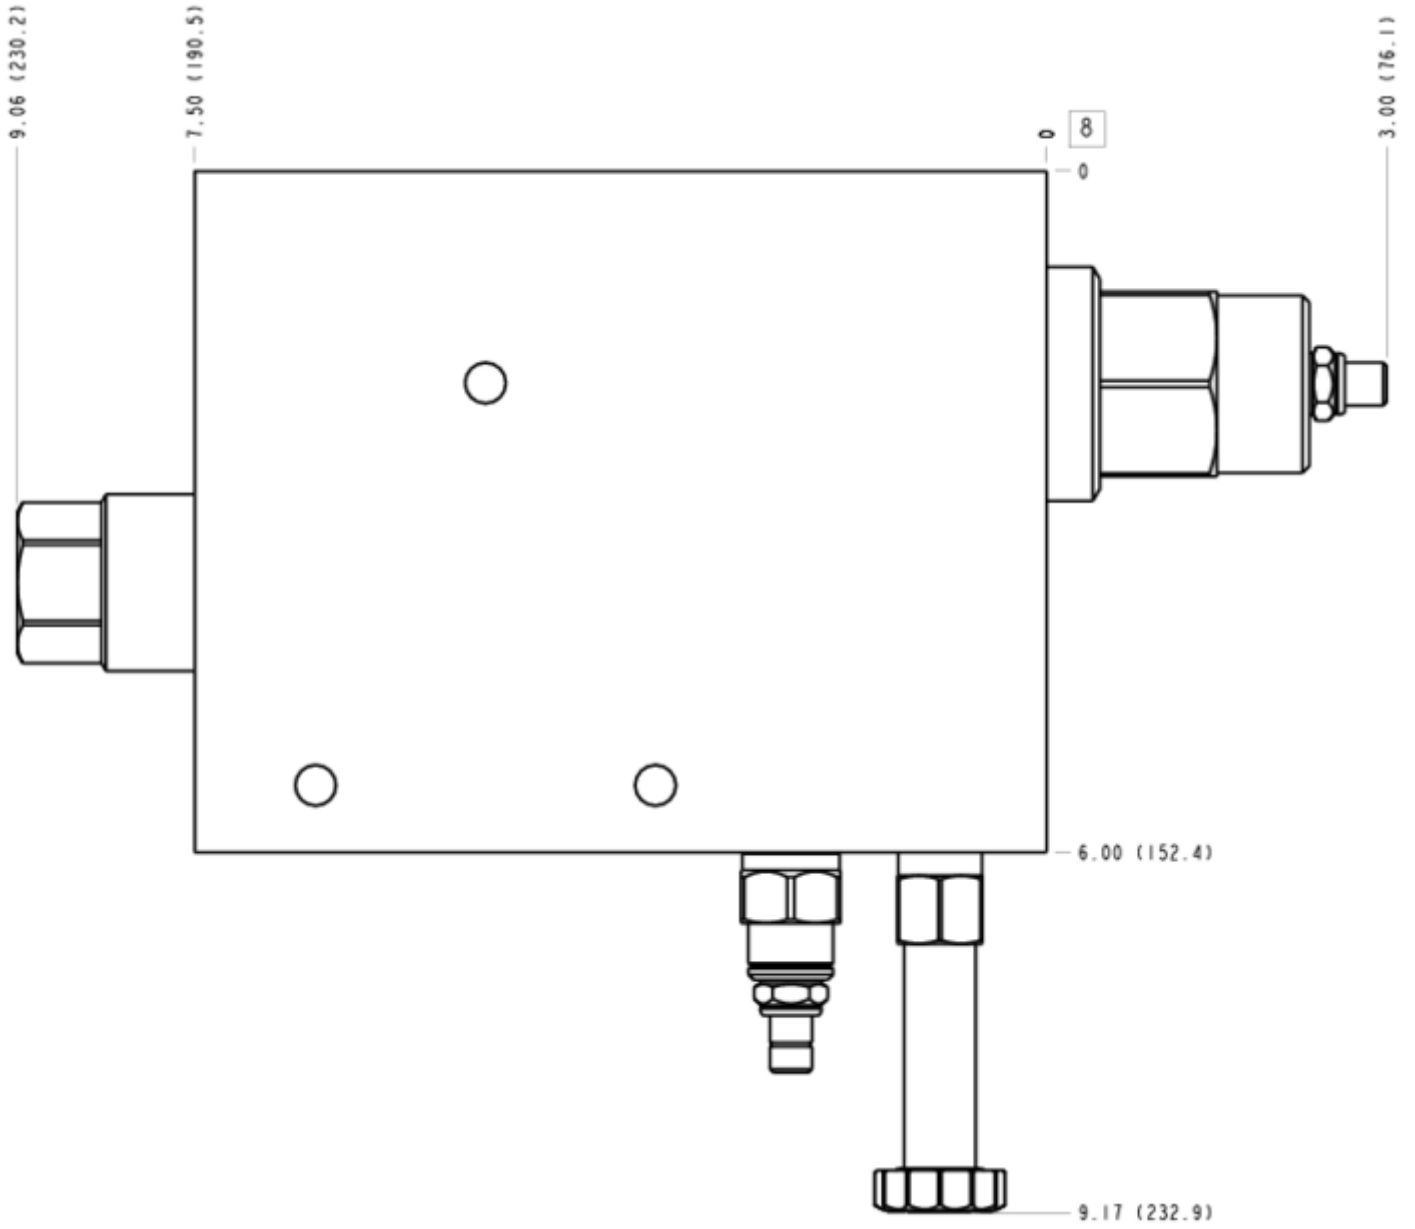

FACE 10

