
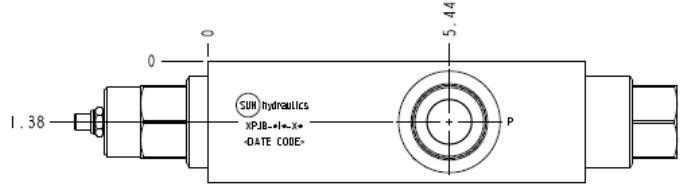
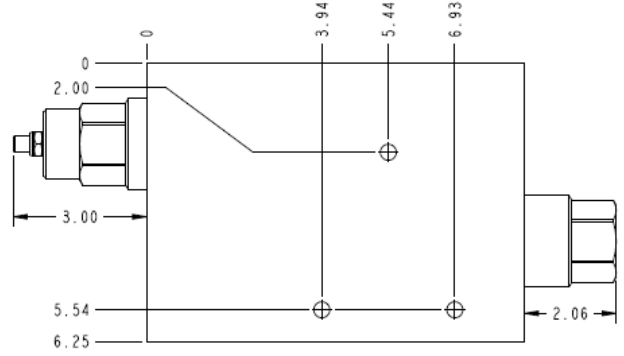


DIMENSIONS ARE IN INCHES



CONFIGURATION OPTIONS

Model Code Example: **XPJBLINXN**

CONTROL	(L) MAXIMUM ORIFICE DIAMETER	(I) SEAL MATERIAL	(N)
L Standard Screw Adjustment	I .85 in. (21,6 mm)	N Buna-N	
		V Viton	

PRIMARY CARTRIDGE (X)

X X (with NFFD primary cartridge, Totalmente ajustable aguja válvula)

INCLUDED COMPONENTS

Part	Description	Quantity
A330-006-016*	SAE Plug	1
LHJAXFN	Cartridge	1
NFFDLIN	Cartridge - Primary	1