




CONFIGURATION

- Adjustment Range
- Seal Material
- Material/Coating

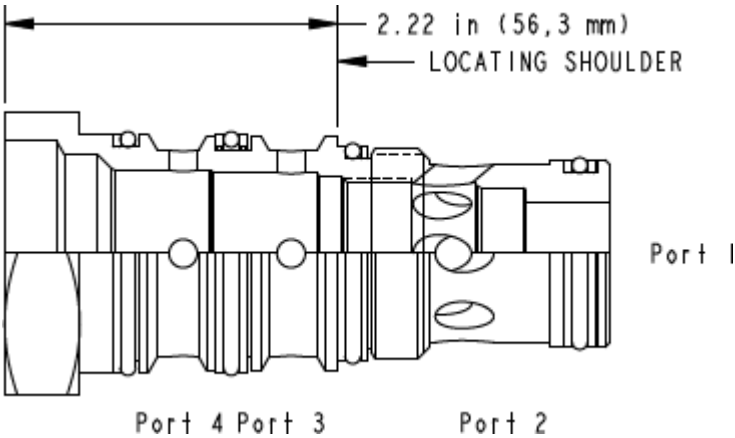

Sun offers a selection of cavity adaptors used to convert one cavity to another. Depending on the configuration, this cavity adaptor converts a Sun T-23A cavity to either a Sun T-21A or T-22A cavity.

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-23A
Series	3
Maximum Operating Pressure	5000 psi
Valve Hex Size	1 7/8 in.
Valve Installation Torque	150 - 160 lbf ft
Seal kit - Cartridge	Buna: 990-023-007
Seal kit - Cartridge	Polyurethane: 990-023-002
Seal kit - Cartridge	Viton: 990-023-006

OPTION SELECTION EXAMPLE: XPOCNXN

ADJUSTMENT RANGE	(X)	SEAL MATERIAL	(V)	MATERIAL/COATING
X -		V Viton		Standard Material/Coating
		N Buna-N		IAP Stainless Steel, Passivated