



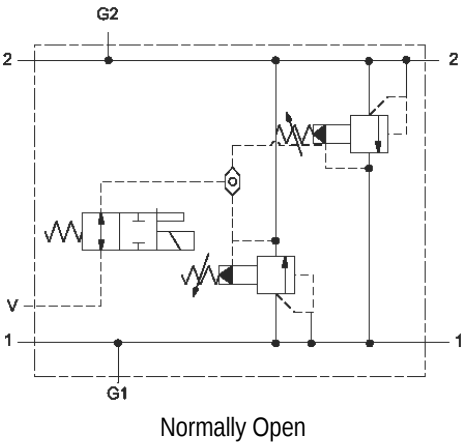

CONFIGURATION

L	Control	Standard Screw Adjustment
A	Adjustment Range	100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar) Standard Setting
N	Seal Material	Buna-N
F	Solenoid Designation	740 Coil-Normally Open (with RVCA primary cartridge, De venteo, pilot-operated, pistón balanceado alivio válvula)
912	Coil	Deutsch DT04-2P 12 VDC

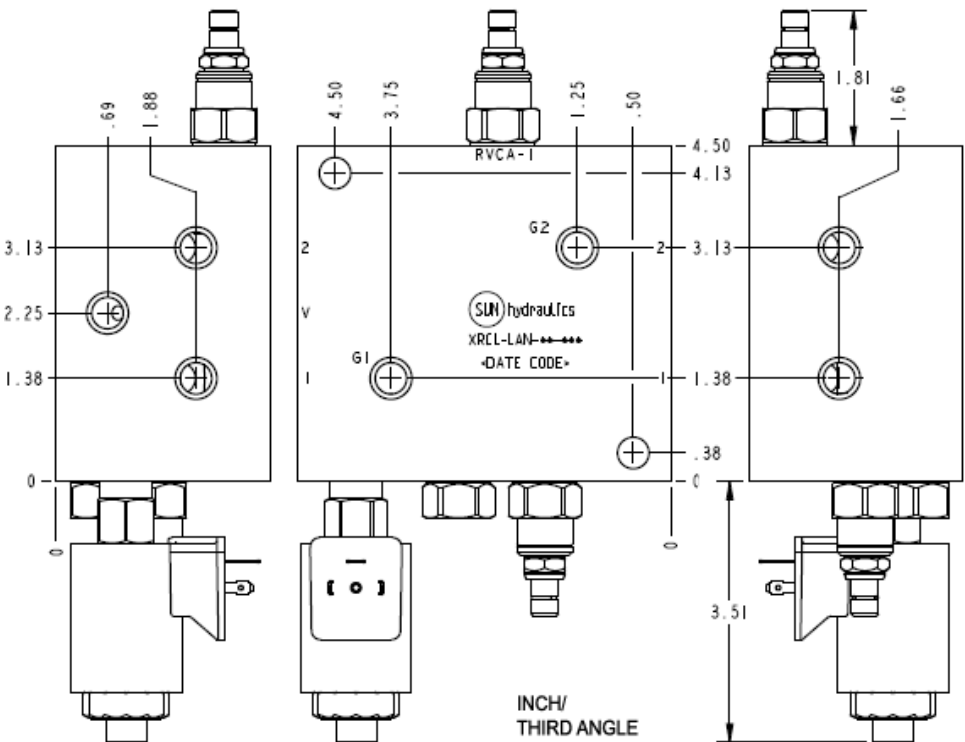

TECHNICAL DATA

Body Type	Line mount
Capacity	60 L/min.
Mounting Hole Diameter	10,7 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2

OPTION SELECTION EXAMPLE: XRCLLANF912

CONTROL		(L)	ADJUSTMENT RANGE	(A)	SEAL MATERIAL	(N)
L	Standard Screw Adjustment	A	100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar) Standard Setting	N	Buna-N	
C	Tamper Resistant - Factory Set	B	50 - 1500 psi (3,5 - 105 bar), 1000 psi (70 bar) Standard Setting	V	Viton	
		C	150 - 6000 psi (10,5 - 420 bar), 1000 psi (70 bar) Standard Setting			
		D	25 - 800 psi (1,7 - 55 bar), 400 psi (28 bar) Standard Setting			
		E	25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting			
		W	150 - 4500 psi (10,5 - 315 bar), 1000 psi (70 bar) Standard Setting			