


## CONFIGURATION

<b>L</b> Control	Standard Screw Adjustment
<b>A</b> Adjustment Range	500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar) Standard Setting
<b>N</b> Seal Material	Buna-N
<b>A</b> Primary Cartridge	A (with RDDA primary cartridge, Acción-directa alivio válvula )
<b>L</b> Port and Material Designation	Ports 1 & 2 — SAE 12; Port T — SAE 8; Gage Ports — SAE 6; Mtg Holes — .375 - 16UNC x .62 DP; Aluminum

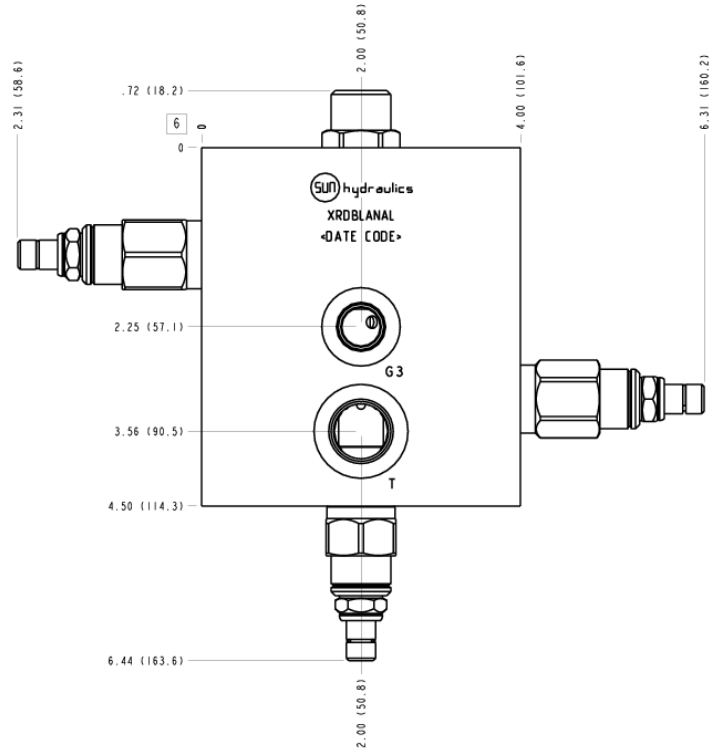

## TECHNICAL DATA

Body Type	montaje en línea
Mounting Hole Quantity	4

**CONFIGURATION OPTIONS**

**Model Code Example: XRDBLANAL**

CONTROL	(L)	ADJUSTMENT RANGE	(A)	SEAL MATERIAL	(N)
<b>L</b>	Standard Screw Adjustment	<b>A</b>	500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar) Standard Setting	<b>N</b>	Buna-N
<b>C</b>	Tamper Resistant - Factory Set	<b>C</b>	1000 - 6000 psi (70 - 420 bar), 1000 psi (70 bar) Standard Setting	<b>V</b>	Viton
<b>J</b>	Capped Screw Adjustment	<b>D</b>	200 - 800 psi (14 - 55 bar), 400 psi (28 bar) Standard Setting		
<b>K</b>	manilla	<b>E</b>	100 - 400 psi (7 - 28 bar), 200 psi (14 bar) Standard Setting		
		<b>S</b>	50 - 200 psi (3,5 - 14 bar), 100 psi (7 bar) Standard Setting		
		<b>W</b>	800 - 4500 psi (55 - 315 bar), 1000 psi (70 bar) Standard Setting		

**PRIMARY CARTRIDGE**

(A)

<b>A</b>	A (with RDDA primary cartridge, Acción-directa alivio válvula )
<b>A</b>	A (with RDDA3 primary cartridge, No-ajustable acción-directa alivio válvula )

**INCLUDED COMPONENTS**

Part	Description	Quantity
DSCHXHN	Cartridge	1
RDDALAN	Cartridge - Primary	2
RPECLNN	Cartridge	1