


**CONFIGURATION**

<b>L</b>	
<b>A</b>	500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar)
<b>N</b>	
<b>A</b>	Primary Cartridge A (with RDHA primary cartridge,
<b>5</b>	Port and Material Designation Ports 1 & 2 — 1-1/4" C62; Port T — SAE 12; Gage Ports — SAE 6; Mtg Holes — .375 - 16UNC x .75 DP; Aluminum

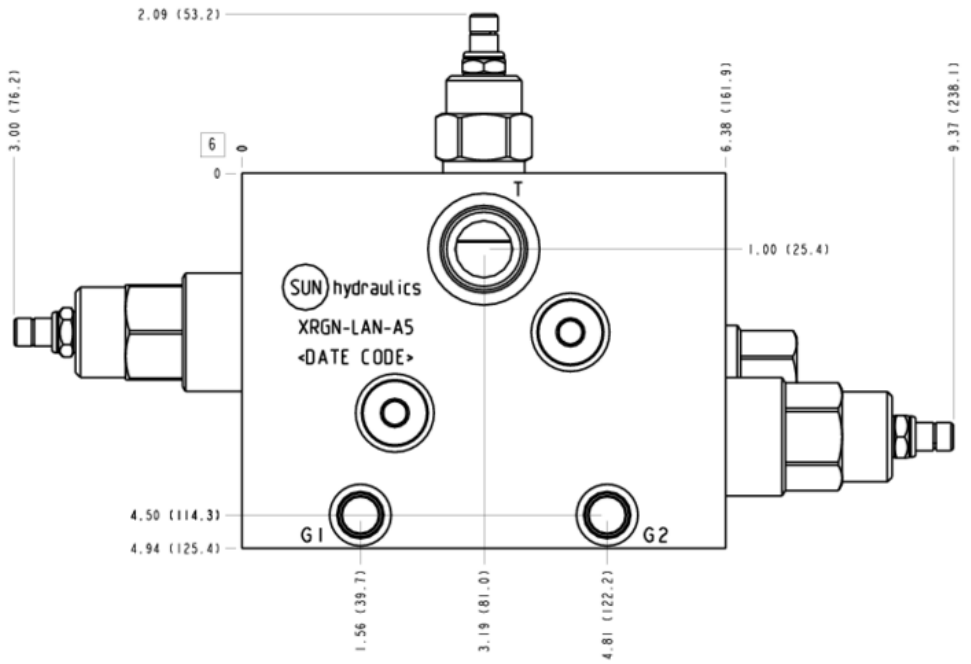

**TECHNICAL DATA**

	4

**CONFIGURATION OPTIONS**

**Model Code Example: XRGNLANA5**

(L)	(A)	(N)
<b>L</b>	<b>A</b> 500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar) <b>B</b> 300 - 1500 psi (20 - 105 bar), 1000 psi (70 bar) <b>C</b> 1000 - 6000 psi (70 - 420 bar), 1000 psi (70 bar) <b>D</b> 200 - 800 psi (14 - 55 bar), 400 psi (28 bar) <b>E</b> 100 - 400 psi (7 - 28 bar), 200 psi (14 bar) <b>S</b> 50 - 200 psi (3,5 - 14 bar), 100 psi (7 bar) <b>W</b> 800 - 4500 psi (55 - 315 bar), 1000 psi (70 bar)	<b>N</b> <b>V</b>

**PRIMARY CARTRIDGE**

(A)

<b>A</b>	A (with RDHA primary cartridge, )
----------	-----------------------------------

**INCLUDED COMPONENTS**

Part	Description	Quantity
A330-006-008*	SAE Plug	2
DSGHXHN	Cartridge	1
RDHALAN	Cartridge - Primary	2
RPGCLNN	Cartridge	1