


CONFIGURATION

L Control	Standard Screw Adjustment
A Adjustment Range	500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar) Standard Setting
N Seal Material	Buna-N
A Primary Cartridge	A (with RDJA primary cartridge, Acción-directa alivio válvula)
Port and	Ports 1 & 2 — 1 1/2" Code 62 ;
6 Material Designation	Port T — SAE 16; Gage Ports — SAE 6; Mtg Holes — .375 - 16UNC x .88 DP; Aluminum

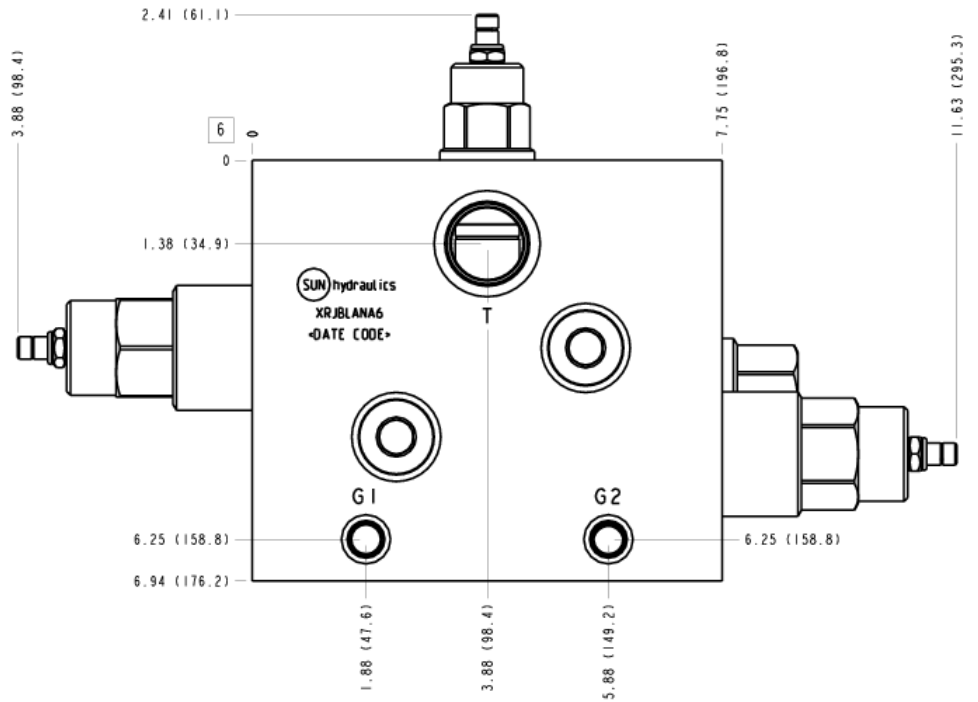

TECHNICAL DATA

Body Type	montaje en línea
Mounting Hole Quantity	4

CONFIGURATION OPTIONS

Model Code Example: XRJBLANA6

CONTROL	(L)	ADJUSTMENT RANGE	(A)	SEAL MATERIAL	(N)
L	Standard Screw Adjustment	A	500 - 3000 psi (35 - 210 bar), 1000 psi (70 bar) Standard Setting	N	Buna-N
C	Tamper Resistant - Factory Set	C	1000 - 6000 psi (70 - 420 bar), 1000 psi (70 bar) Standard Setting	V	Viton
		D	200 - 800 psi (14 - 55 bar), 400 psi (28 bar) Standard Setting		
		E	100 - 400 psi (7 - 28 bar), 200 psi (14 bar) Standard Setting		
		S	50 - 200 psi (3,5 - 14 bar), 100 psi (7 bar) Standard Setting		
		W	800 - 4500 psi (55 - 315 bar), 1000 psi (70 bar) Standard Setting		

PRIMARY CARTRIDGE

(A)

A	A (with RDJA primary cartridge, Acción-directa alivio válvula.)
----------	---

INCLUDED COMPONENTS

Part	Description	Quantity
A330-006-012*	SAE Plug	2
DSHXHN	Cartridge	1
RDJALAN	Cartridge - Primary	2
RPICLNN	Cartridge	1