


0.96 (24.38) LOCATING SHOULDER

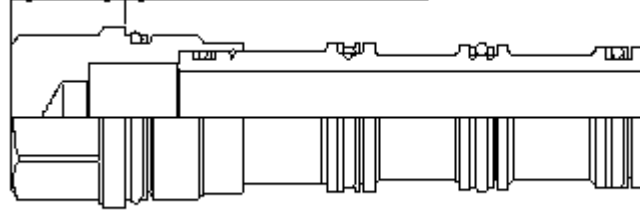

PORT 1

PORT 4

PORT 3

PORT 2

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

| | |
|----------------------------|---------------------------|
| cavidad | T-33A |
| Series | 3 |
| Maximum Operating Pressure | 350 bar |
| Valve Hex Size | 31,8 mm |
| Valve Installation Torque | 203 - 217 Nm |
| Seal kit - Cartridge | Buna: 990-033-007 |
| Seal kit - Cartridge | Polyurethane: 990-033-002 |
| Seal kit - Cartridge | Viton: 990-033-006 |
| Seal kit - Cartridge | Buna: 990-033-007 |
| Seal kit - Cartridge | Polyurethane: 990-033-002 |
| Seal kit - Cartridge | Viton: 990-033-006 |

OPTION SELECTION EXAMPLE: XTCAXXN

| CONTROL | (X) | ADJUSTMENT RANGE | (X) | SEAL MATERIAL | (N) | MATERIAL/COATING |
|---------|-----|------------------|-----|---------------|--------|---------------------------------|
| X | - | X | - | N | Buna-N | Standard Material/Coating |
| | | | | V | Viton | /AP Stainless Steel, Passivated |