


CONFIGURATION

X	
E	75 psi (5 bar)
N	
A	Primary Cartridge A (with CXFA primary cartridge,)
L	Port and Material Designation Ports P, T, A1, A2 — SAE 12; Aluminum

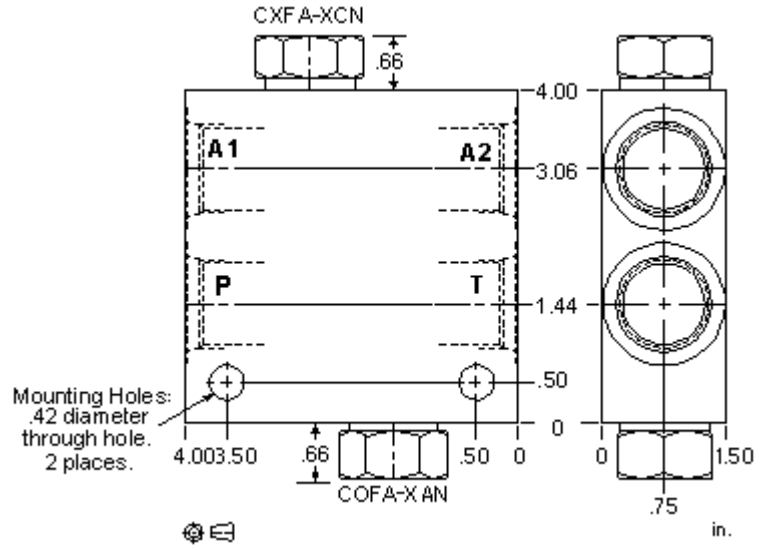

TECHNICAL DATA

NOTE:

		DATA
	160 L/min.	MAY
	10,4 mm	VARY
	Through	BY
	2	

CONFIGURATION. SEE CONFIGURATION SECTION.

OPTION SELECTION EXAMPLE: YCFEXENAL

(X) (E) (N)

X	E 75 psi (5 bar)	N
	A 4 psi (0,3 bar)	V
	B 15 psi (1 bar)	
	C 30 psi (2 bar)	
	D 50 psi (3,5 bar)	
	F 100 psi (7 bar)	
	Z 1 psi (0,07 bar)	

PRIMARY CARTRIDGE

(A)

A	A (with CXFA primary cartridge,)
----------	-----------------------------------

INCLUDED COMPONENTS

Part	Description	Quantity
COFAXAN	Cartridge	1
CXFAXEN	Cartridge - Primary	1