


CONFIGURATION

X Control	piloto estándar
C Cracking Pressure	30 psi (2 bar)
N Seal Material	Buna-N
A Primary Cartridge	A (with CODA primary cartridge, Pilotaje para cerrar anti-retorno válvula)
N Port and Material Designation	Ports P, A1, A2 — SAE 20; Port T — SAE 8; Mtg Holes — .41 DIA (10,4 mm) THRU; Aluminum

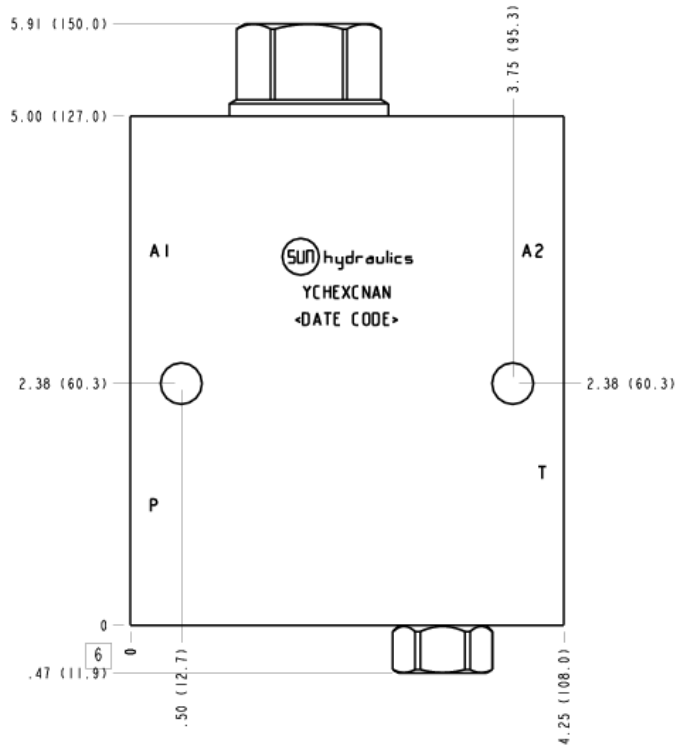

TECHNICAL DATA

Body Type	montaje en línea
Mounting Hole Quantity	2

CONFIGURATION OPTIONS

Model Code Example: YCHEXCNAN

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)
X	piloto estándar	C	30 psi (2 bar)	N	Buna-N
L	activador manual	F	100 psi (7 bar)	V	Viton
		G	150 psi (10,5 bar)		
		Z	1 psi (0,07 bar)		

PRIMARY CARTRIDGE

(A)

A	A (with CODA primary cartridge, Pilotaje para cerrar anti-retorno válvula)
---	---

INCLUDED COMPONENTS

Part	Description	Quantity
CODAXCN	Cartridge - Primary	1
CXHAXCN	Cartridge	1