



A to B

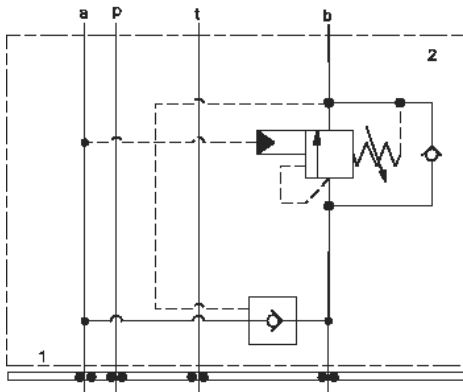

B to A

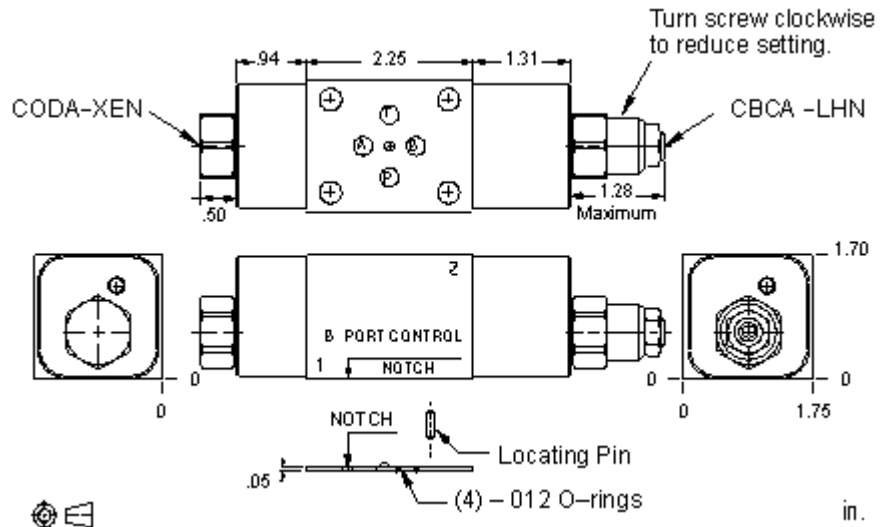

CONFIGURATION OPTIONS

Model Code Example: YDCALINAA

CONTROL	(L) FUNCTIONAL SETTING RANGE	(I) SEAL MATERIAL	(N)
L Standard Screw Adjustment	I 400 - 1500 psi w/25 psi Check (28 - 105 bar w/ 1,7 bar Check), 1000 psi (70 bar) Standard Setting	N Buna-N	(N)
C Tamper Resistant - Factory Set		V Viton	

PRIMARY CARTRIDGE

(A)

A A (with CBCA primary cartridge, Proporción de pilotaje 3:1 , capacidad estándar contrabalance válvula)
A A (with CBCAX primary cartridge, Ajuste fijo, proporción de pilotaje 3:1 , capacidad estándar contrabalance válvula)

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012*	O-Ring	4
700-002*	Seal Plate	1
811-001-006*	Pin	1
850-004-218*	Plug	2
CBCALIN	Cartridge - Primary	1
CODAXEN	Cartridge	1