

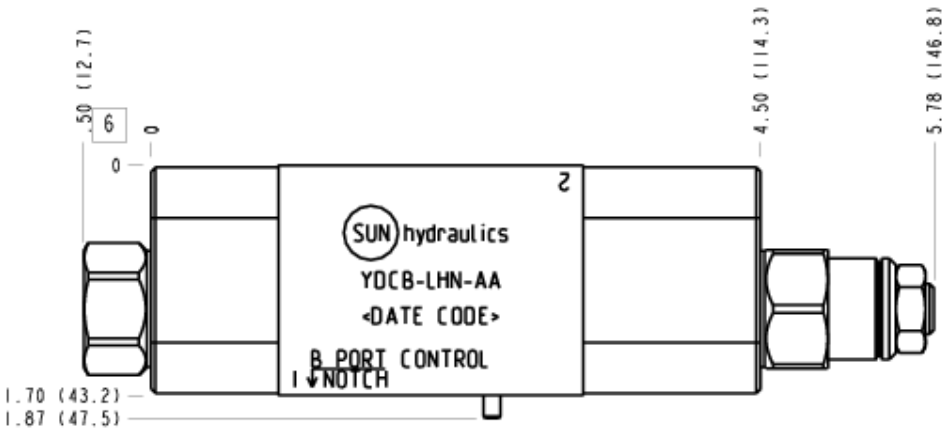


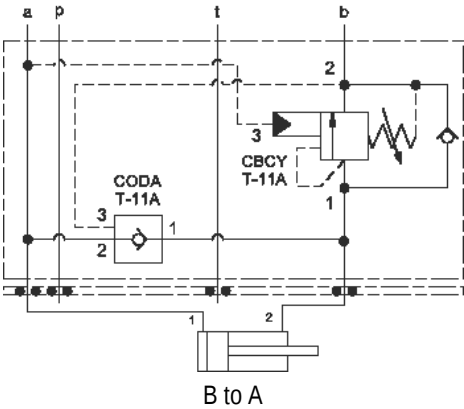

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Body Type	aplilables
Interface	ISO 03
Body Features	A to B or B to A
Seal Plate Included (see notes)	Yes
Stack Height	44,5 mm

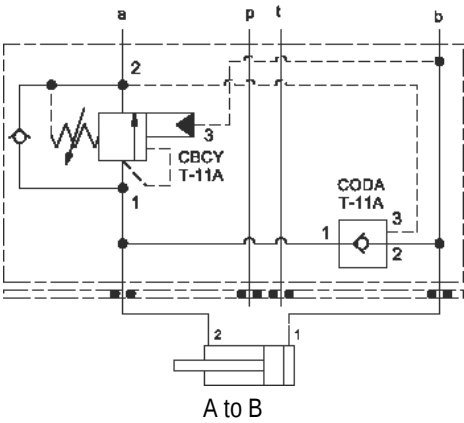

MODELO
YDCB

Sensible a la presión regenerador ensamblaje
CAPACIDAD: 60 L/min.

Continued from
previous page

CONFIGURATION OPTIONS Model Code Example: YDCBLHNAA

CONTROL		(L)	FUNCTIONAL SETTING RANGE	(H)	SEAL MATERIAL	(N)	
L	Standard Screw Adjustment	H	1000 - 4000 psi w/25 psi Check (70 - 280 bar w/ 1,7 bar Check), 3000 psi (210 bar) Standard Setting	N	Buna-N		
C	Tamper Resistant - Factory Set				Viton		
		A	1000 - 4000 psi w/4 psi Check (70 - 280 bar w/ 0,3 bar Check), 3000 psi (210 bar) Standard Setting				
		B	400 - 1500 psi w/4 psi Check (28 - 105 bar w/ 0,3 bar Check), 1000 psi (70 bar) Standard Setting				

PRIMARY CARTRIDGE		(A)
A	A (with CBCY primary cartridge, Proporción de pilotaje 2:1 , capacidad estándar contrabalance válvula)	
A	A (with CBCYX primary cartridge, Ajuste fijo, proporción de pilotaje 2:1 , capacidad estándar contrabalance válvula)	

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012*	O-Ring	4
700-002*	Seal Plate	1
811-001-006*	Pin	1
850-004-218*	Plug	2
CBCYLHN	Cartridge - Primary	1
CODAXEN	Cartridge	1