


4 Interface Bolt Holes  
x .38 deep  
Inch: 10-24 UNC  
Metric: M5 x 0.8

Mounting Holes:  
.28 diameter through hole.  
2 places.

Turn screw clockwise  
to reduce setting on  
CBCA.

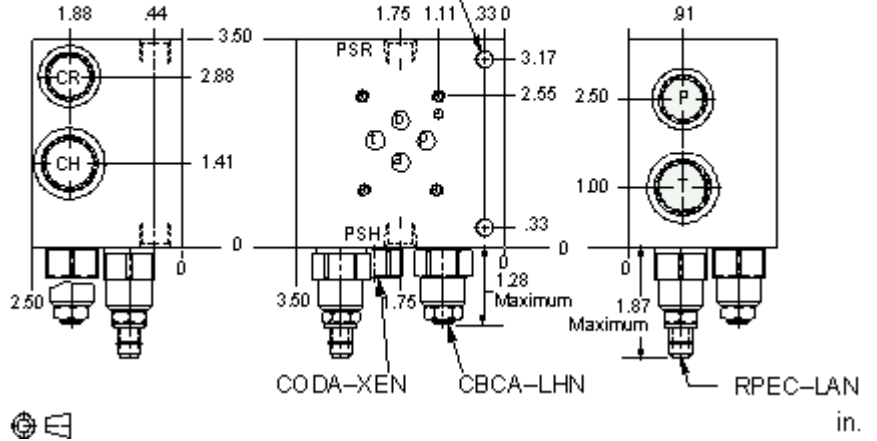

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	ISO 03
	7,1 mm
	Through
	2

**CONFIGURATION OPTIONS**

**Model Code Example: YDCGLHNBK**

(L)	(H)	(N)
<b>L</b>	<b>H</b> 1000 - 4000 psi 25 psi (70 - 280 bar 1.1), 3000 psi (210 bar)	<b>N</b>
	<b>A</b> 1000 - 4000 psi 4 psi (70 - 280 bar 0.3 bar), 3000 psi (210 bar)	<b>V</b>
	<b>B</b> 400 - 1500 psi 4 psi (28 - 105 bar 0.3 bar), 1000 psi (70 bar)	
	<b>I</b> 400 - 1500 psi 25 psi (28 - 105 bar 1.7 bar), 1000 psi (70 bar)	

**PRIMARY CARTRIDGE**

**(B)**

<b>B</b>	B (with CBCA primary cartridge, 3:1, )
<b>B</b>	B (with CBCAX primary cartridge, , 3:1, )

**INCLUDED COMPONENTS**

Part	Description	Quantity
CBCALHN	Cartridge - Primary	1
CODAXEN	Cartridge	1
RPECLAN	Cartridge	1