


4 Interface Bolt Holes
x .38 deep
Inch: 10-24 UNC
Metric: M5 x 0.8

Mounting Holes:
.28 diameter through hole.
2 places.

Turn screw clockwise
to reduce setting on
CBCA.

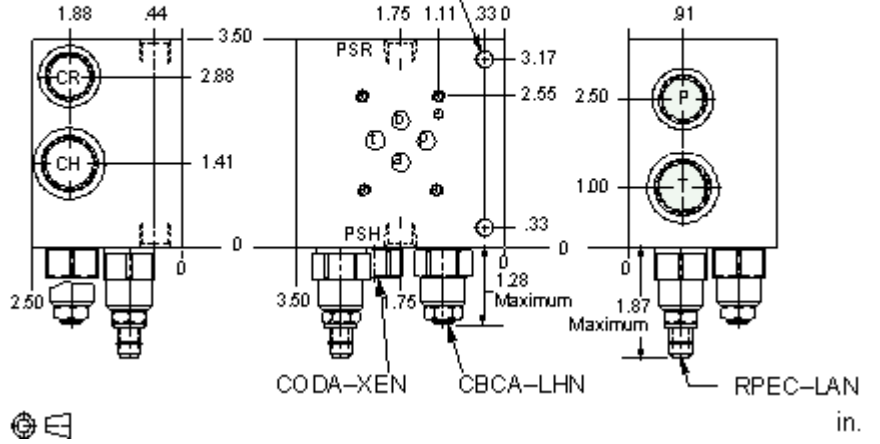

CONFIGURATION OPTIONS

Model Code Example: YDCGLINBK

| CONTROL | (L) FUNCTIONAL SETTING RANGE | (I) SEAL MATERIAL | (N) |
|---|--|-------------------|------------|
| L Standard Screw Adjustment | I 400 - 1500 psi w/25 psi Check (28 - 105 bar w/ 1,7 bar Check), 1000 psi (70 bar) Standard Setting | N Buna-N | (N) |
| C Tamper Resistant - Factory Set | | V Viton | |

PRIMARY CARTRIDGE **(B)**

| |
|--|
| B B (with CBCA primary cartridge, Proporción de pilotaje 3:1 , capacidad estándar contrabalance válvula) |
| B B (with CBCAX primary cartridge, Ajuste fijo, proporción de pilotaje 3:1 , capacidad estándar contrabalance válvula) |

INCLUDED COMPONENTS

| Part | Description | Quantity |
|---------|---------------------|----------|
| CBCALIN | Cartridge - Primary | 1 |
| CODAXEN | Cartridge | 1 |
| RPECLAN | Cartridge | 1 |