


4 Interface Bolt Holes
x .38 deep
Inch: 10-24 UNC
Metric: M5 x 0.8

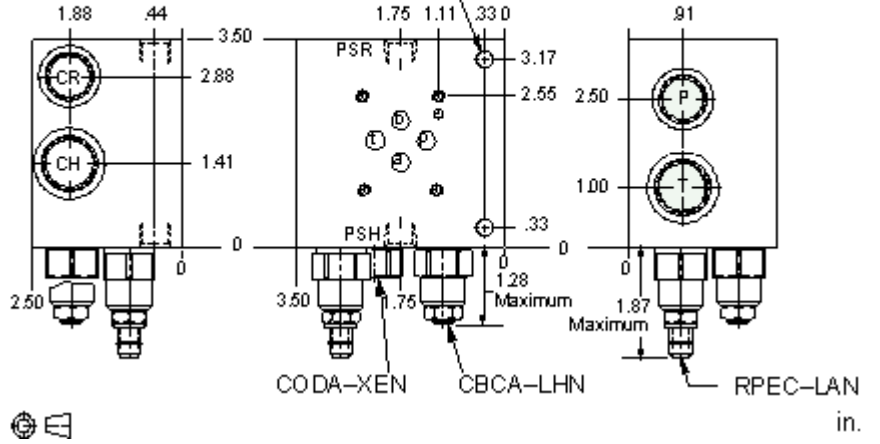

TECHNICAL DATA

Body Type	Subplate
Interface	ISO 03
Capacity	40 L/min.
Mounting Hole Diameter	7,1 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2

OPTION SELECTION EXAMPLE: YDCGLINBK

CONTROL	(L) FUNCTIONAL SETTING RANGE	(I) SEAL MATERIAL	(N)
L Standard Screw Adjustment	I 400 - 1500 psi w/25 psi Check (28 - 105 bar w/ 1,7 bar Check), 1000 psi (70 bar) Standard Setting	N Buna-N	(N)
C Tamper Resistant - Factory Set		V Viton	
PRIMARY CARTRIDGE			(B)
B B (with CBCA primary cartridge, Proporción de pilotaje 3:1 , capacidad estándar contrabalance válvula)			
B B (with CBCAX primary cartridge, Ajuste fijo, proporción de pilotaje 3:1 , capacidad estándar contrabalance válvula)			

INCLUDED COMPONENTS

Part	Description	Quantity
CBCALIN	Cartridge - Primary	1
CODAXEN	Cartridge	1
RPECLAN	Cartridge	1