


CONFIGURATION

X Control	Not Adjustable
C Cracking Pressure	30 psi (2 bar)
N Seal Material	Buna-N
B Primary Cartridge	B (with CXEE primary cartridge, Caudal libre del lado a la nariz anti-retorno válvula con puerto 3 bloqueado)
A Port and Material Designation	A Aluminum

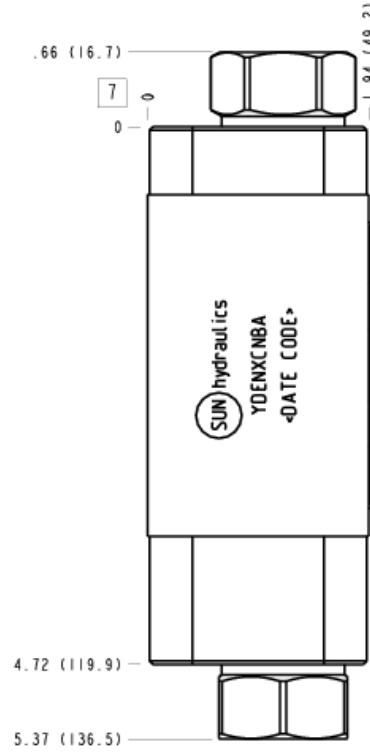

TECHNICAL DATA

Body Type	apilables
Interface	ISO 05
Body Features	B a A
Seal Plate Included (see notes)	No
Stack Height	49 mm

CONFIGURATION OPTIONS

Model Code Example: YDENXCNBA

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)
X	Not Adjustable	C	30 psi (2 bar)	N	Buna-N
		F	100 psi (7 bar)	V	Viton
		Z	1 psi (0,07 bar)		

PRIMARY CARTRIDGE

(B)

B	B (with CXEE primary cartridge, Caudal libre del lado a la nariz anti-retorno válvula con puerto 3 bloqueado)
---	---

INCLUDED COMPONENTS

Part	Description	Quantity
340-001*	Pipe Plug	2
500-001-014*	O-Ring	5
COFAXEN	Cartridge	1
CXEEXCN	Cartridge - Primary	1