


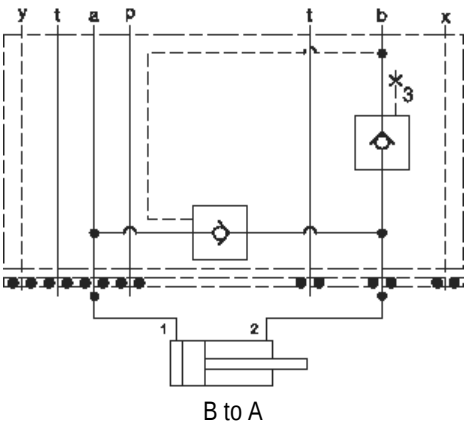

TECHNICAL DATA

	ISO 05 - X&Y
()	
	B A

CONFIGURATION

X	
C	30 psi (2 bar)
N	
B	Primary Cartridge B (with CXEE primary cartridge, 3)

CONFIGURATION OPTIONS

Model Code Example: YDEWXCNB

	(X)	(C)	(N)
X	C	30 psi (2 bar)	N
	A	4 psi (0,3 bar)	V
	B	15 psi (1 bar)	
	D	50 psi (3,5 bar)	
	E	75 psi (5 bar)	
	F	100 psi (7 bar)	

PRIMARY CARTRIDGE

(B)

B	B (with CXEE primary cartridge,	3)
---	---------------------------------	-----