





CONFIGURATION

X	Control	Not Adjustable
C	Cracking Pressure	30 psi (2 bar)
N	Seal Material	Buna-N
B	Primary Cartridge	B (with CXEE primary cartridge, Caudal libre del lado a la nariz anti-retorno válvula con puerto 3 bloqueado)

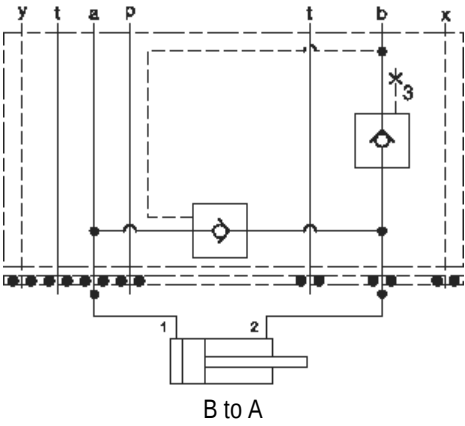

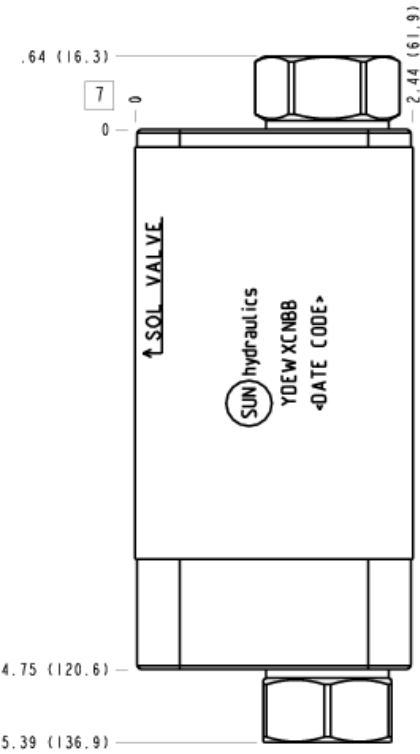

MODELO
YDEW

Tiempo completo regenerador ensamble
CAPACIDAD: 95 L/min.

Continued from
previous page

CONFIGURATION OPTIONS Model Code Example: YDEWXCNBB

CONTROL		(X)	CRACKING PRESSURE		(C)	SEAL MATERIAL		(N)
X	Not Adjustable		C	30 psi (2 bar)		N	Buna-N	
			A	4 psi (0,3 bar)		V	Viton	
			B	15 psi (1 bar)				
			D	50 psi (3,5 bar)				
			E	75 psi (5 bar)				
			F	100 psi (7 bar)				

PRIMARY CARTRIDGE (B)

B	B (with CXEE primary cartridge, Caudal libre del lado a la nariz anti-retorno válvula con puerto 3 bloqueado)
---	---

INCLUDED COMPONENTS

Part	Description	Quantity
340-001*	Pipe Plug	2
COFAXEN	Cartridge	1
CXEEXCN	Cartridge - Primary	1