



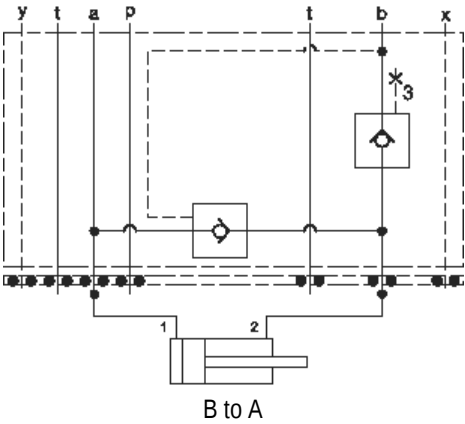

CONFIGURATION

X Control	Not Adjustable
C Cracking Pressure	30 psi (2 bar)
N Seal Material	Buna-N
B Primary Cartridge	B (with CXEE primary cartridge, Caudal libre del lado a la nariz anti-retorno válvula con puerto 3 bloqueado)

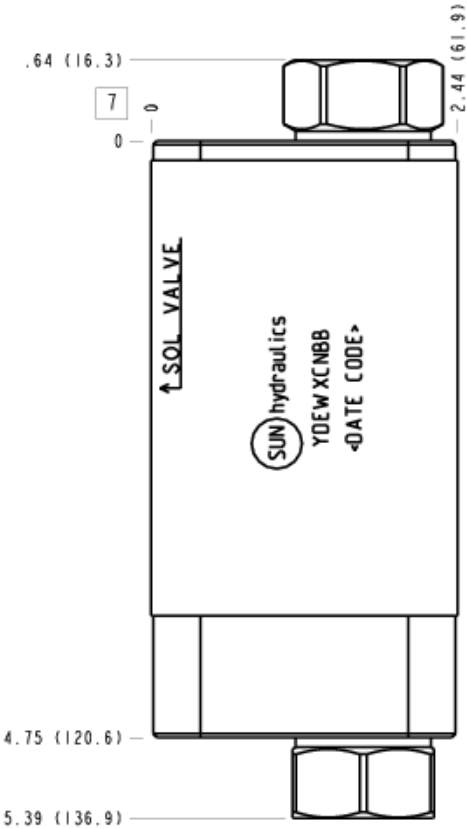

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 05 - X&Y
Capacity	95 L/min.
Body Features	B to A
Seal Plate Included (see notes)	No
Stack Height	63 mm

OPTION SELECTION EXAMPLE: YDEWXCNNB

CONTROL	(X)	CRACKING PRESSURE	(C)	SEAL MATERIAL	(N)
X	Not Adjustable	C	30 psi (2 bar)	N	Buna-N
		A	4 psi (0,3 bar)	V	Viton
		B	15 psi (1 bar)		
		D	50 psi (3,5 bar)		
		E	75 psi (5 bar)		
		F	100 psi (7 bar)		

PRIMARY CARTRIDGE	(B)
B	B (with CXEE primary cartridge, Caudal libre del lado a la nariz anti-retorno válvula con puerto 3 bloqueado)

INCLUDED COMPONENTS


Part	Description	Quantity
340-001*	Pipe Plug	2
COFAXEN	Cartridge	1
CXEEXCN	Cartridge - Primary	1

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


FACE 2

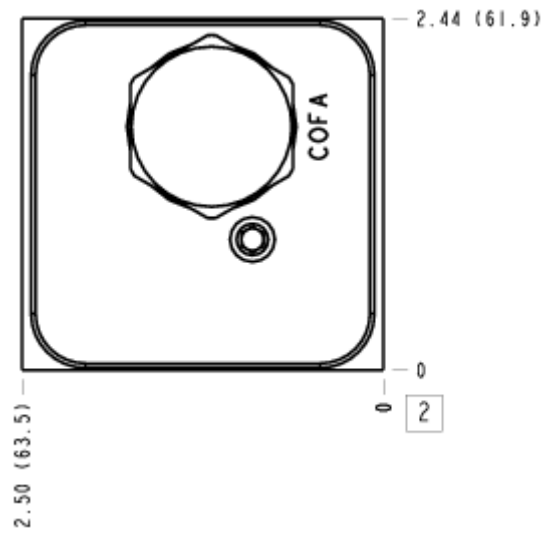


FACE 5

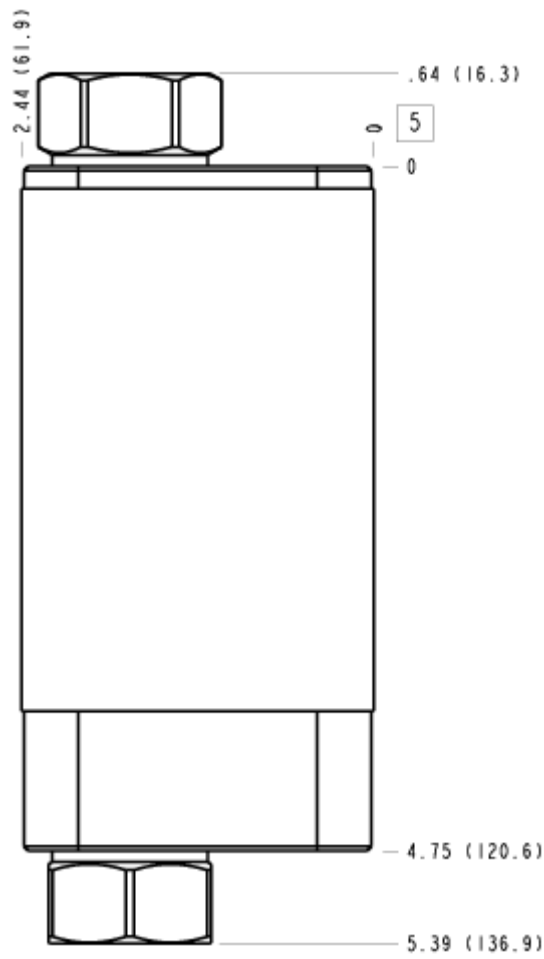


FACE 6

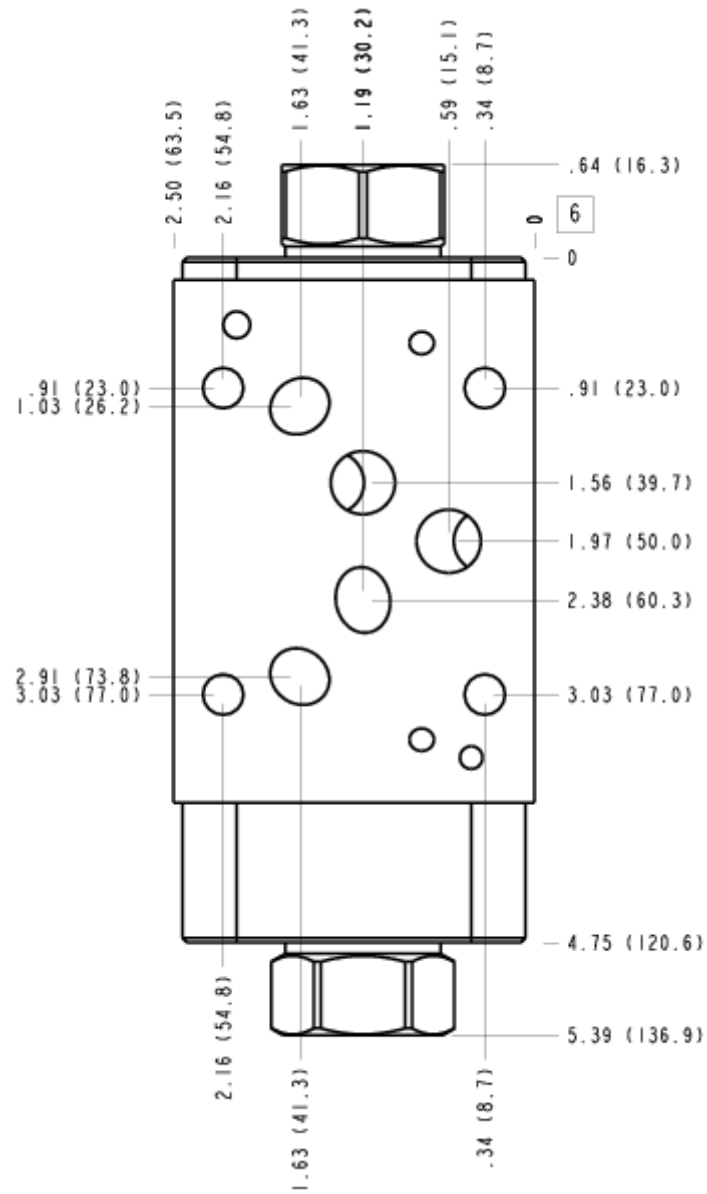

FACE 7

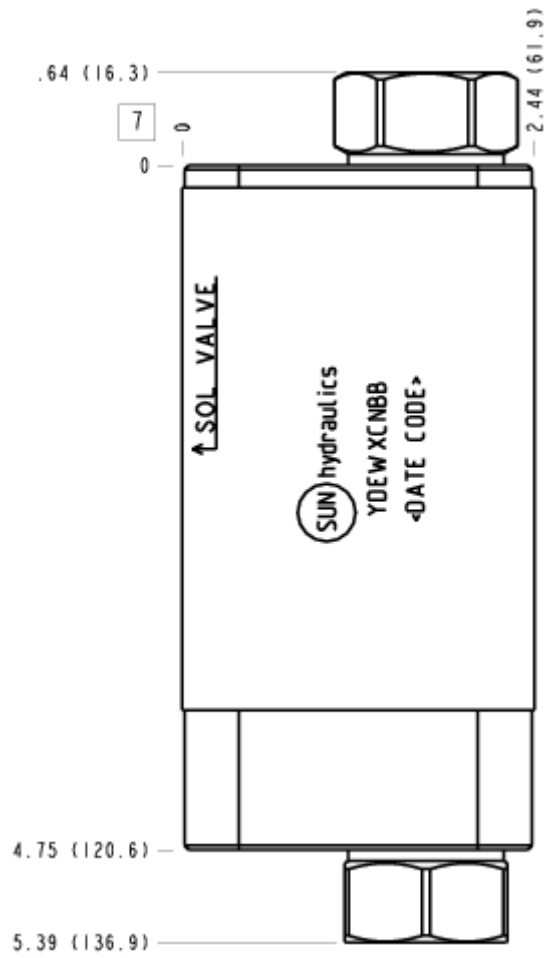

FACE 8

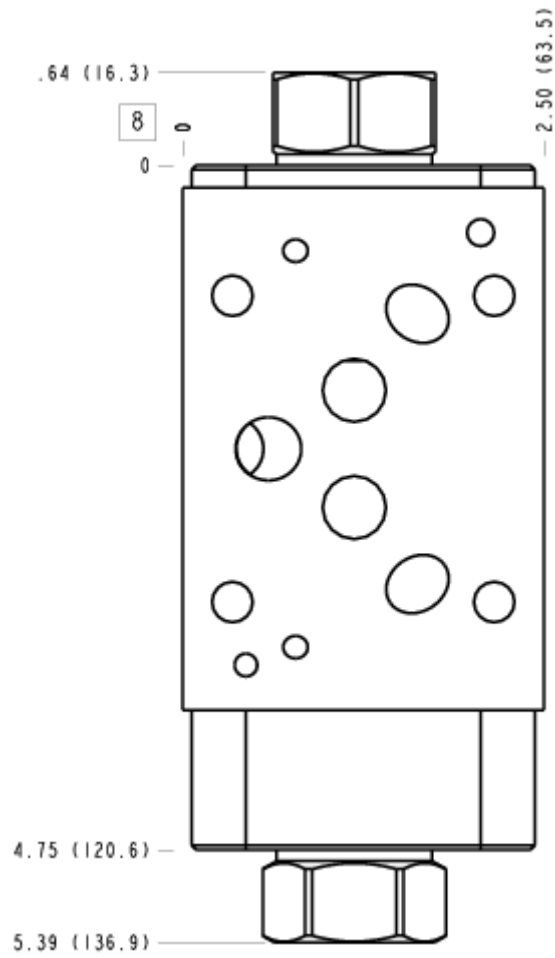

FACE 10

