


Bypass pressure compensator

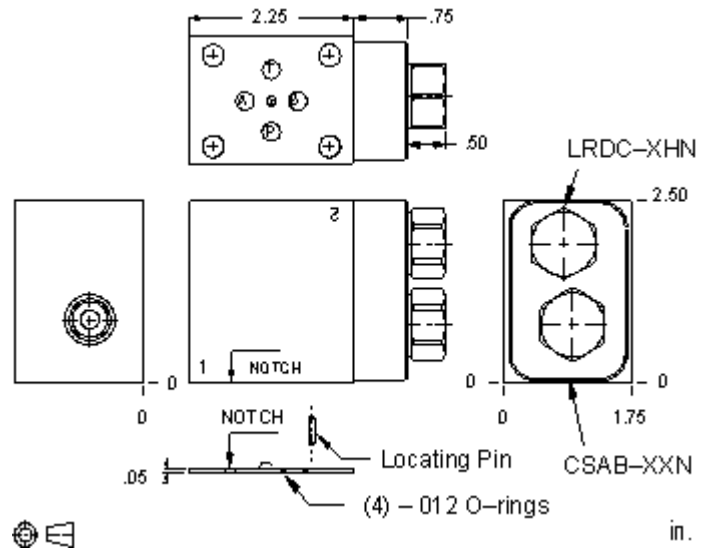

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Capacity	60 L/min.
Body Features	Meter in P
Seal Plate Included (see notes)	Yes
Stack Height	2.55 in.

OPTION SELECTION EXAMPLE: YFCKXCHCNAA

CONTROL (X)	DIFFERENTIAL PRESSURE (C)	DIFFERENTIAL PRESSURE (C)	SEAL MATERIAL (N)	SEAL MATERIAL (N)	CONTROL LETTER(S) OF SUBORDINATE CARTRIDGE (A)	MATERIAL DESIGNATION (A)
X Not Adjustable	C 30 psi (2 bar) D 50 psi (3,5 bar) F 100 psi (7 bar) H 200 psi (14 bar)	C 30 psi (2 bar) D 50 psi (3,5 bar) E 75 psi (5 bar) F 100 psi (7 bar)	N Buna-N V Viton	N Buna-N V Viton	A A (with LRDC primary cartridge, Normalmente cerrado, elementos de modulación) A A (with LRDC primary cartridge, Ajustable, normalmente cerrado, elementos de modulación)	A A Aluminum A/S A/S Iron