



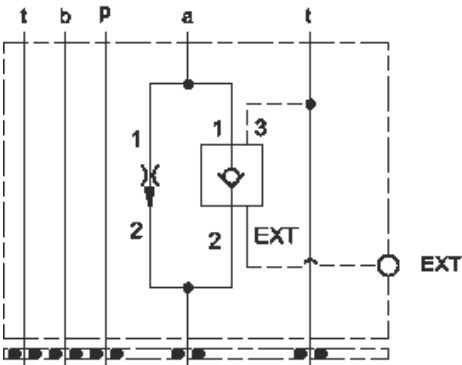

Meter in A

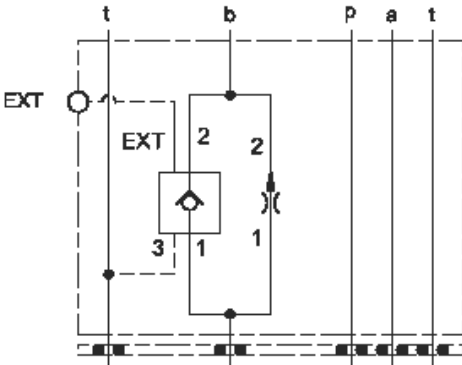

Meter out B

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Body Type	aplilables
Interface	ISO 05
Capacity	120 L/min.
Body Features	Meter in on A or meter out on B
Control Flow Range	0 - 12 gpm
Seal Plate Included (see notes)	Yes
Stack Height	63 mm



MODELO
YFEE

Avance rápido y regulado control de caudal ensamble
CAPACIDAD: 120 L/min.

Continued from
previous page

OPTION SELECTION EXAMPLE: YFEEXANBA

CONTROL		(X)	SETTING RANGE	(A)	SEAL MATERIAL	(N)
X	Not Adjustable		A	Replaceable Orifice .1 - 12 gpm (0,4 - 45 L/min.)	N	Buna-N
C	Tamper Resistant - Factory Set				V	Viton
K	manilla		B	Permanent Orifice .1 - 12 gpm (0,4 - 45 L/min.)		
L	Tuning Adjustment		I	Incomplete (no orifice) 17 gpm (64 L/min.)		

PRIMARY CARTRIDGE		(B)
B	B (with FXDA primary cartridge, Fixed-orifice, compensado por presión control de caudal válvula)	
B	B (with FXDA8 primary cartridge, De venteo fixed-orifice, compensado por presión control de caudal válvula con cavidad de control T-8A integral)	

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-014*	O-Ring	5
700-001*	Seal Plate	1
CKEIVCN	Cartridge	1
FXDAXAN	Cartridge - Primary	1