


Meter in A

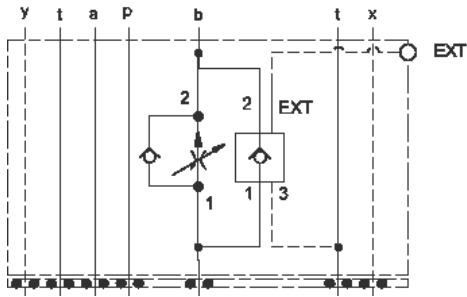

Meter out B

This assembly consists of a fully-adjustable, pressure-compensated flow control with reverse-flow check which provides precise flow regulation for meter-in or meter-out applications where there may be wide pressure fluctuations. It is infinitely adjustable from nearly closed up to the maximum flow. An integral high-capacity check valve provides unrestricted flow in the reverse direction. The rapid or feed rate is selected by a vented, pilot-to-open check valve with an external pilot port.

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Body Type	Sandwich
Interface	ISO 05 - X&Y
Capacity	30 gpm
Body Features	Meter in on A or meter out on B
Control Flow Range	0 - 12 gpm
Seal Plate Included (see notes)	Yes
Stack Height	2.49 in.

- NOTES:**
- The external 1/4 NPTF pilot port is part of the pilot to open check cartridge.
  - Stack height value in technical data table includes seal retainer plate.
  - For detailed information regarding the cartridges contained in this assembly, click on the models codes shown in the Included Components tab.
  - **Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

**OPTION SELECTION EXAMPLE: YFEOLANB**

CONTROL		(L) ADJUSTMENT RANGE	(A) SEAL MATERIAL	(N)	
<b>L</b>	Standard Screw Adjustment	<b>A</b>	.2 - 12 gpm (0,8 - 45 L/min.)	<b>N</b>	Buna-N
<b>C</b>	Tamper Resistant - Factory Set	<b>B</b>	.2 - 3 gpm (0,8 - 11 L/min.)	<b>V</b>	Viton
<b>H</b>	Calibrated Handknob with Detent Lock				
<b>K</b>	Handknob				
<b>Y</b>	Tri-Grip Handknob				
<b>PRIMARY CARTRIDGE</b>				<b>(B)</b>	
<b>B</b>	B (with FDCB primary cartridge, Fully adjustable pressure compensated flow control valve with reverse flow check)				

**TECHNICAL FEATURES**

- The sharp-edged orifice design minimizes flow variations due to viscosity changes.
- A balanced adjustment mechanism allows for easy adjustment even at high pressures.