


Restrictive pressure compensator with load sense port

CONFIGURATION

X Control	Not Adjustable
F Differential Pressure	100 psi (7 bar)
N Seal Material	Buna-N
A Primary Cartridge	A (with LPHC primary cartridge, Normalmente abierto, elementos de modulación)

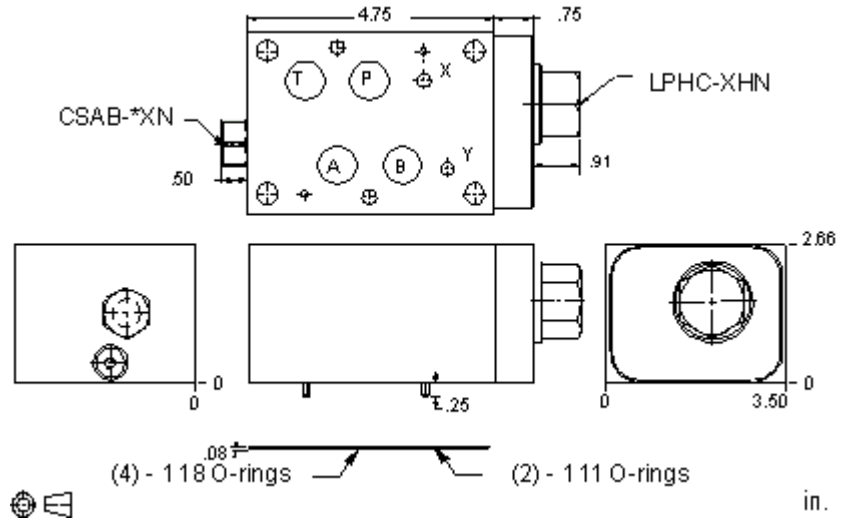

TECHNICAL DATA

Body Type	aplilables
Interface	ISO 07
Body Features	alimentación regulada en P
Seal Plate Included (see notes)	Yes
Stack Height	70 mm

CONFIGURATION OPTIONS

Model Code Example: YFFFXFNA

CONTROL	(X)	DIFFERENTIAL PRESSURE	(F)	SEAL MATERIAL	(N)
X	Not Adjustable	F	100 psi (7 bar)	N	Buna-N
		G	150 psi (10,5 bar)	V	Viton
		H	200 psi (14 bar)		

PRIMARY CARTRIDGE

(A)

A	A (with LPHC primary cartridge, Normalmente abierto, elementos de modulación)
A	A (with LPHCL primary cartridge, Ajustable, normalmente abierto, elementos de modulación)