


Restricativa pressure compensator

CONFIGURATION

X Control	Not Adjustable
F Differential Pressure	100 psi (7 bar)
N Seal Material	Buna-N
C Primary Cartridge	C (with LPJC primary cartridge, Normalmente abierto, elementos de modulación)
A Material Designation	A Aluminum

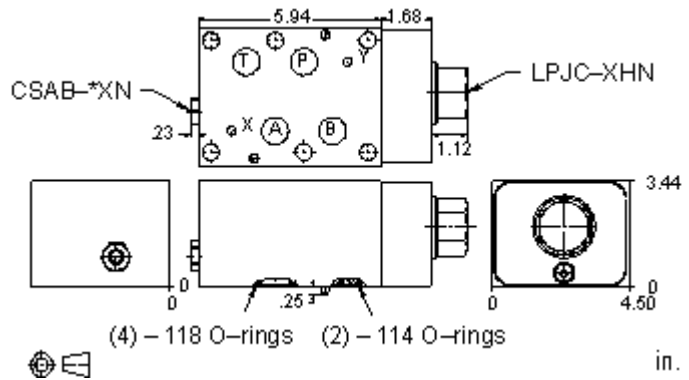

TECHNICAL DATA

Body Type	apilables
Interface	ISO 08
Body Features	alimentación regulada en P
Seal Plate Included (see notes)	No
Stack Height	87 mm

CONFIGURATION OPTIONS

Model Code Example: YFIAXFNCA

CONTROL	(X)	DIFFERENTIAL PRESSURE	(F)	SEAL MATERIAL	(N)
X	Not Adjustable	F	100 psi (7 bar)	N	Buna-N
L	Tuning Adjustment	G	150 psi (10,5 bar)	V	Viton
P	External 1/4 NPTF Pilot Port, Port 3 Blocked	H	200 psi (14 bar)		

PRIMARY CARTRIDGE (C)

C	C (with LPJC primary cartridge, Normalmente abierto, elementos de modulación)
----------	--

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-114*	O-Ring	2
500-001-121*	O-Ring	4
811-001-002*	Locating Pin	1
A330-006-004*	SAE Plug	1
CSABXXN	Cartridge	1
LPJCXFN	Cartridge - Primary	1