


Restriuctive presssure compensator

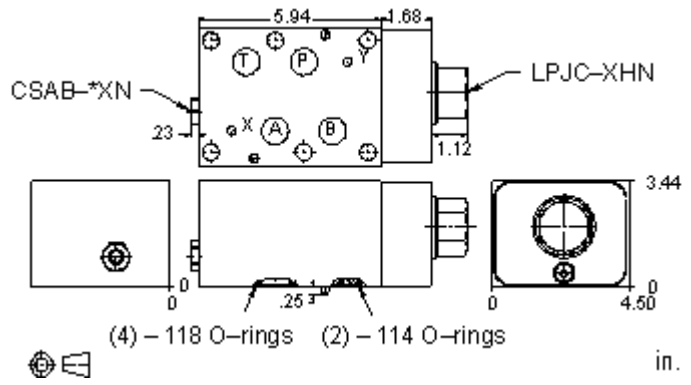

**CONFIGURATION OPTIONS**

Model Code Example: YFIAXHNCA

CONTROL	(X)	DIFFERENTIAL PRESSURE	(H)	SEAL MATERIAL	(N)
X	Not Adjustable	H	200 psi (14 bar)	N	Buna-N
		D	50 psi (3,5 bar)	V	Viton
		F	100 psi (7 bar)		

**PRIMARY CARTRIDGE**

(C)

**C** C (with LPJC primary cartridge, Normalmente abierto, elementos de modulación )

**INCLUDED COMPONENTS**

Part	Description	Quantity
500-001-114*	O-Ring	2
500-001-121*	O-Ring	4
811-001-002*	Locating Pin	1
A330-006-004*	SAE Plug	1
CSABXXN	Cartridge	1
LPJCXHN	Cartridge - Primary	1