


CONFIGURATION

| | |
|---|---|
| X | |
| F | 100 psi (7 bar) |
| N | |
| C | Primary Cartridge C (with LRJC primary cartridge,) |

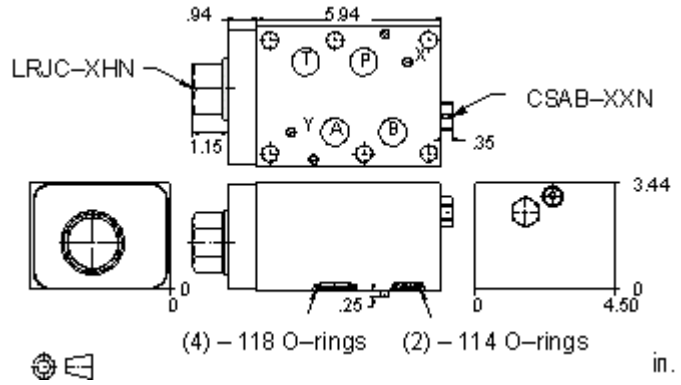

TECHNICAL DATA

| | |
|--|--------|
| | |
| | ISO 08 |
| | P |

CONFIGURATION OPTIONS

Model Code Example: YFICXFNC

| | (X) | (F) | (N) |
|----------|-----------------------------|----------|-----|
| X | F 100 psi (7 bar) | N | |
| L | D 50 psi (3,5 bar) | V | |
| | G 150 psi (10,5 bar) | | |
| | H 200 psi (14 bar) | | |

PRIMARY CARTRIDGE

(C)

| | |
|----------|-----------------------------------|
| C | C (with LRJC primary cartridge,) |
|----------|-----------------------------------|