


CONFIGURATION

| | |
|---|---|
| X | |
| F | 100 psi (7 bar) |
| N | |
| C | Primary Cartridge C (with LRJC primary cartridge,) |

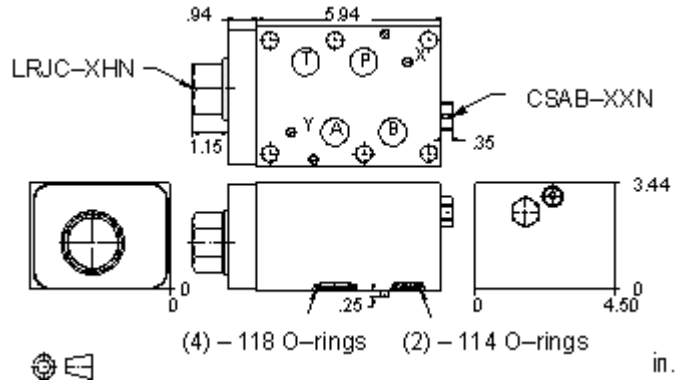

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

| | |
|--|------------|
| | |
| | ISO 08 |
| | 480 L/min. |
| | P |

OPTION SELECTION EXAMPLE: YFICXFNC

(X)

(F)

(N)

| | | | |
|----------|----------|--------------------|----------|
| X | F | 100 psi (7 bar) | N |
| L | D | 50 psi (3,5 bar) | V |
| | G | 150 psi (10,5 bar) | |
| | H | 200 psi (14 bar) | |

PRIMARY CARTRIDGE

(C)

| | |
|----------|-------------------------------------|
| C | C (with LRJC primary cartridge, ,) |
|----------|-------------------------------------|