


CONFIGURATION

X Control	Not Adjustable
F Differential Pressure	100 psi (7 bar)
N Seal Material	Buna-N
C Primary Cartridge	C (with LRJC primary cartridge, Normalmente cerrado, elementos de modulación)
A Material Designation	A Aluminum

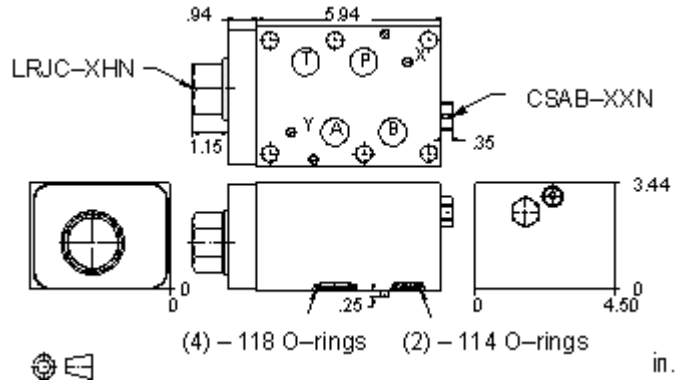

NOTE: DATA MAY VARY FROM PART TO PART. SEE CONFIGURATION SECTION.

TECHNICAL DATA

Body Type	apilables
Interface	ISO 08
Capacity	480 L/min.
Body Features	alimentación regulada en P

OPTION SELECTION EXAMPLE: YFICXFNCA

CONTROL	(X) DIFFERENTIAL PRESSURE	(F) SEAL MATERIAL	(N)
X Not Adjustable	F 100 psi (7 bar)	N Buna-N	
L Tuning Adjustment	G 150 psi (10,5 bar)	V Viton	
	H 200 psi (14 bar)		

PRIMARY CARTRIDGE (C)

C C (with LRJC primary cartridge, Normalmente cerrado, elementos de modulación)
--

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-114*	O-Ring	2
500-001-121*	O-Ring	4
811-001-002*	Locating Pin	1
A330-006-004*	SAE Plug	1
CSABXXN	Cartridge	1
LRJCXFN	Cartridge - Primary	1