

**TECHNICAL DATA** NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

|  |                      |
|--|----------------------|
|  |                      |
|  | 12 - 60 L/min.       |
|  | .375-16 UNC - 2B in. |
|  | 15,7 mm              |
|  | 4                    |

**OPTION SELECTION EXAMPLE: YGDAXANAK**

(X) (A) (N)

|   |         |   |
|---|---------|---|
| X | A 50/50 | N |
|---|---------|---|

V

**PRIMARY CARTRIDGE**

(A)

|   |                                       |
|---|---------------------------------------|
| A | A (with FSDA primary cartridge, , - ) |
|---|---------------------------------------|

**INCLUDED COMPONENTS**


| Part          | Description         | Quantity |
|---------------|---------------------|----------|
| A330-006-006* | SAE Plug            | 2        |
| FSCAXAN       | Cartridge           | 2        |
| FSDAXAN       | Cartridge - Primary | 1        |

**MANIFOLD FACES**


**FACE GRID**

|   |    |    |    |
|---|----|----|----|
| 1 | 2  | 3  | 4  |
| 5 | 6  | 7  | 8  |
| 9 | 10 | 11 | 12 |


FACE 2

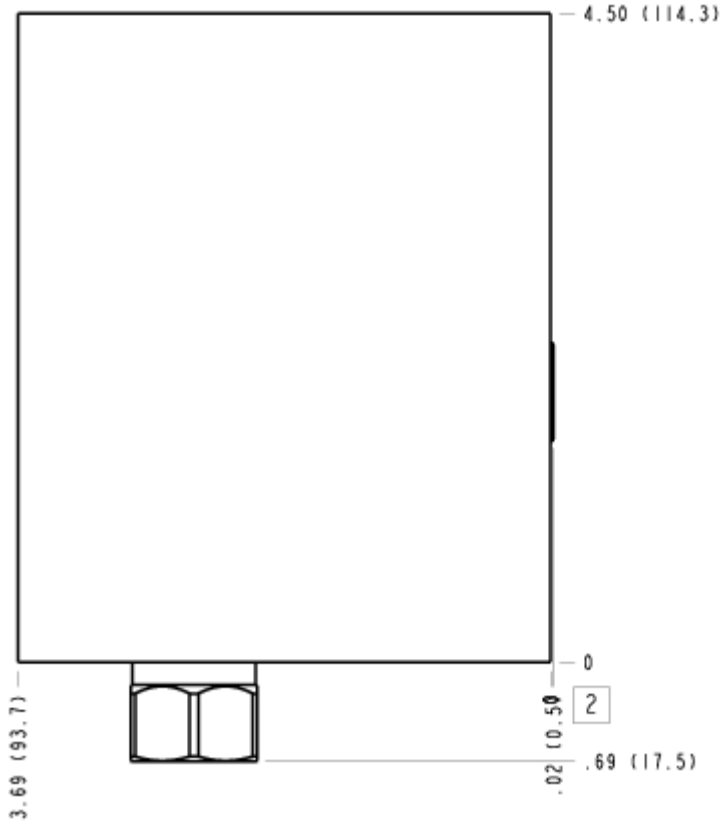

# FACE 5

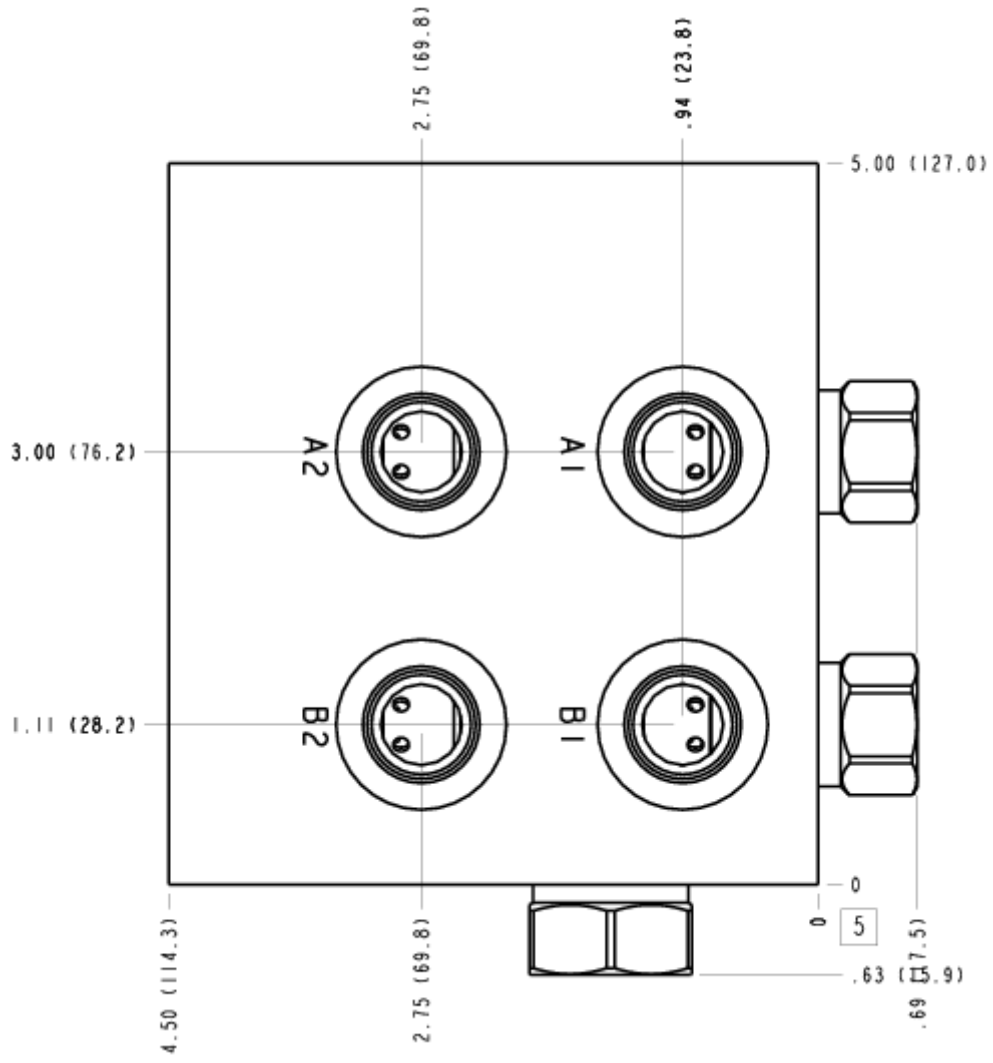


FACE 6

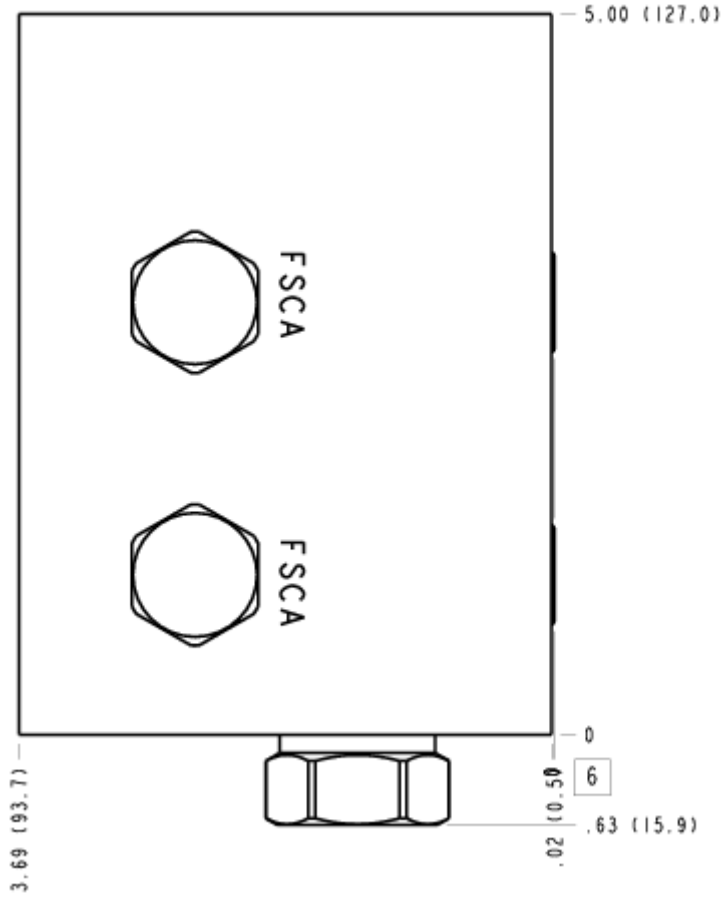



FACE 8

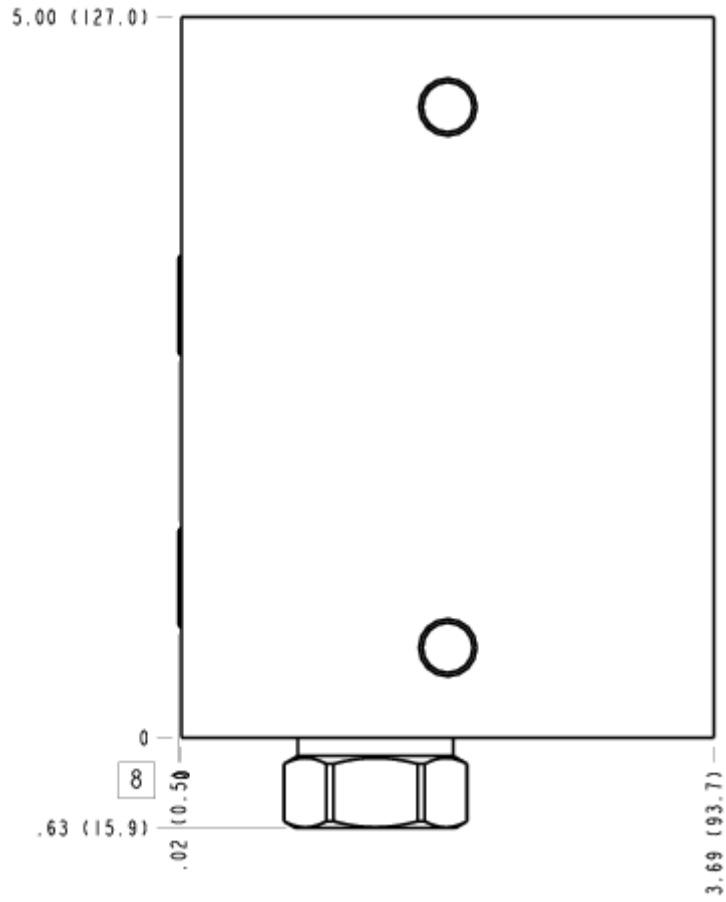

FACE 10

