


Meter in A

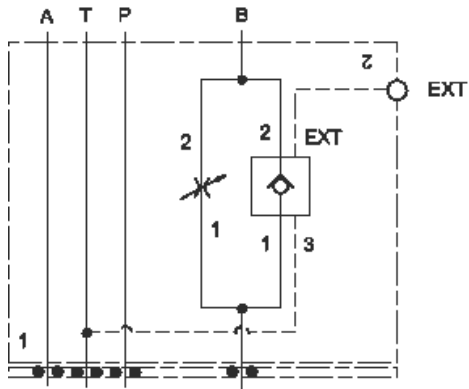

Meter out B

TECHNICAL DATA

Body Type	Sandwich
Interface	ISO 03
Capacity	60 L/min.
Body Features	Meter in on A or meter out on B
Control Flow Range	0 - 7 gpm
Seal Plate Included (see notes)	Yes
Stack Height	44,5 mm

OPTION SELECTION EXAMPLE: YNCFLCNA

CONTROL	(L) MAXIMUM ORIFICE DIAMETER	(C) SEAL MATERIAL	(N)
L Standard Screw Adjustment	C .19 in. (4,8 mm)	N Buna-N	
	D .09 in. (2,3 mm)	V Viton	

PRIMARY CARTRIDGE (A)

A A (with NFCC primary cartridge, Totalmente ajustable aguja válvula)

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012*	O-Ring	4
700-002*	Seal Plate	1
811-001-006*	Pin	1
850-004-250*	Plug	2
CKCHVCN	Cartridge	1
NFCCLCN	Cartridge - Primary	1