


### CONFIGURATION

L Control	Standard Screw Adjustment
A Adjustment Range	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting
N Seal Material	Buna-N
A Primary Cartridge	A (with PBDB primary cartridge, Pilot-operated, pressure reducing valve)
A Port and Material Designation	A Aluminum

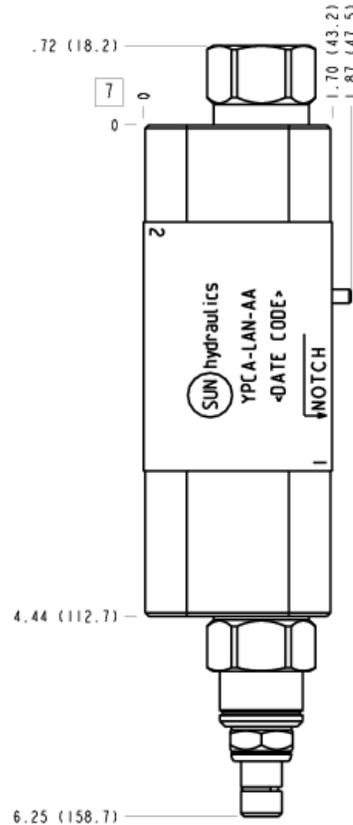

### TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Interface	ISO 03
Capacity	10 gpm
Body Features	On A with reverse flow check
Seal Plate Included (see notes)	Yes
Stack Height	1.76 in.

- NOTES:**
- **Important:** Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.
  - For detailed information regarding the cartridges contained in this assembly, click on the models codes shown in the Included Components tab.

**OPTION SELECTION EXAMPLE: YPCALANAA**

CONTROL	(L) ADJUSTMENT RANGE	(A) SEAL MATERIAL	(N)
<b>L</b> Standard Screw Adjustment	<b>A</b> 100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting	<b>N</b> Buna-N	
<b>C</b> Tamper Resistant - Factory Set	<b>B</b> 50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar) Standard Setting	<b>V</b> Viton	
<b>K</b> Handknob	<b>C</b> 150 - 6000 psi (10,5 - 420 bar), 200 psi (14 bar) Standard Setting		
<b>W</b> Hex Wrench Adjustment	<b>D</b> 25 - 800 psi (1,7 - 55 bar), 200 psi (14 bar) Standard Setting		
<b>Y</b> Tri-Grip Handknob	<b>E</b> 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting		
	<b>N</b> 60 - 800 psi (4 - 55 bar), 200 psi (14 bar) Standard Setting		
	<b>Q</b> 60 - 400 psi (4 - 28 bar), 200 psi (14 bar) Standard Setting		
	<b>W</b> 150 - 4500 psi (10,5 - 315 bar), 200 psi (14 bar) Standard Setting		

**PRIMARY CARTRIDGE (A)**

<b>A</b>	A (with PBDB primary cartridge, Pilot-operated, pressure reducing valve)
<b>A</b>	A (with PBDB8 primary cartridge, Pilot-operated, pressure reducing main stage with integral T-8A control cavity)

**INCLUDED COMPONENTS**


Part	Description	Quantity
500-001-012*	O-Ring	4
700-002*	Seal Plate	1
811-001-006*	Pin	1
850-004-250*	Plug	2
CXDAXCN	Cartridge	1
PBDBLAN	Cartridge - Primary	1

# MANIFOLD FACES


## FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


## FACE 2

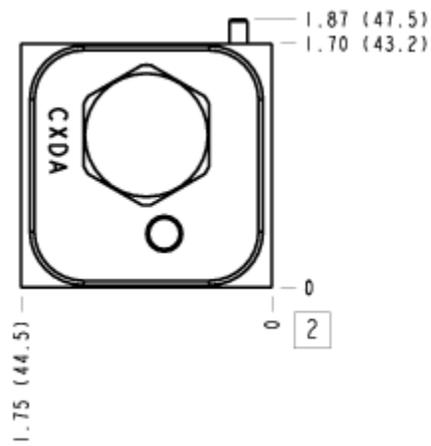


# FACE 6

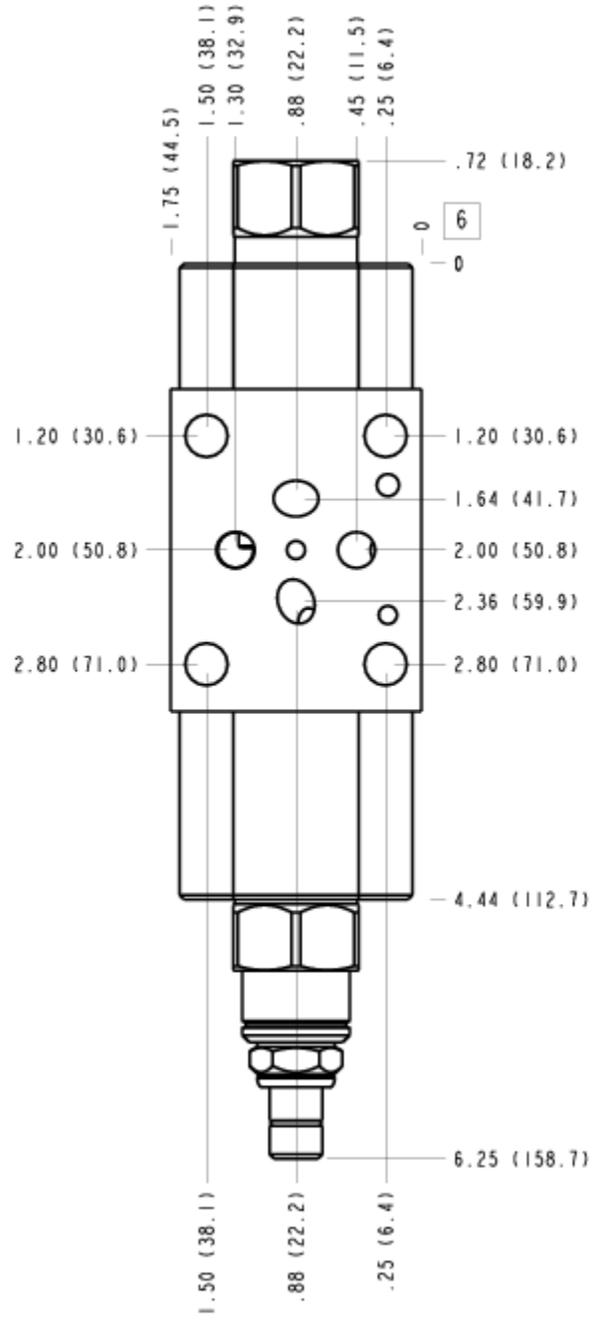

FACE 7

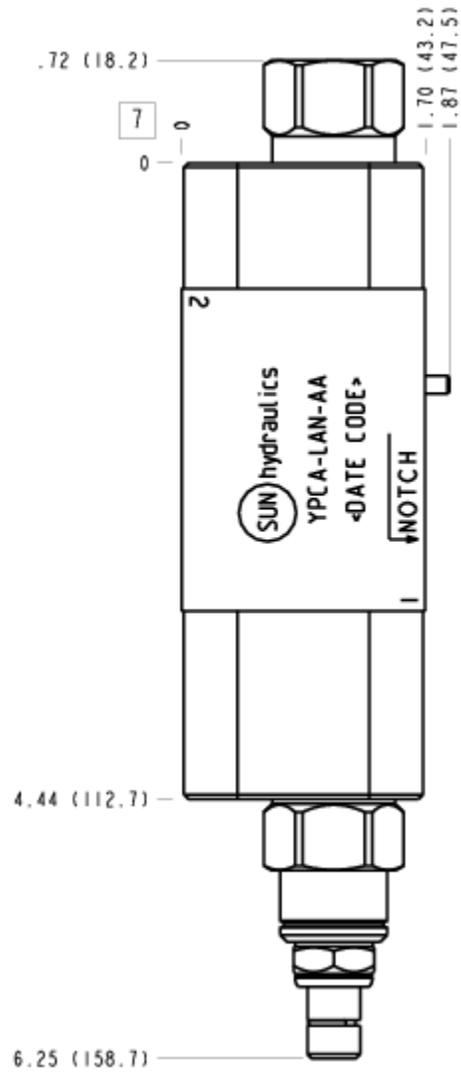

### FACE 8

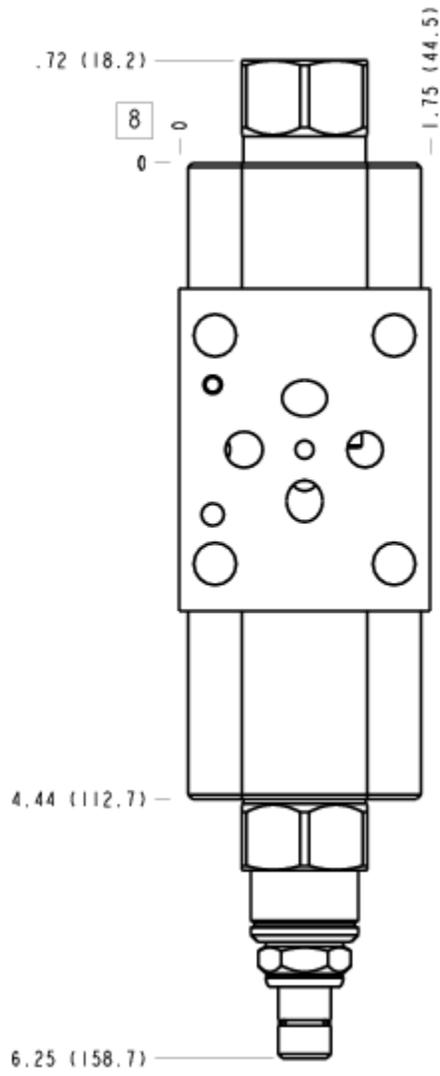

### FACE 10

