


CONFIGURATION

L Control	Standard Screw Adjustment
A Adjustment Range	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting
N Seal Material	Buna-N
A Primary Cartridge	A (with PBDB primary cartridge, Pilot-operated, reductor de presión válvula)
A Port and Material Designation	A Aluminum

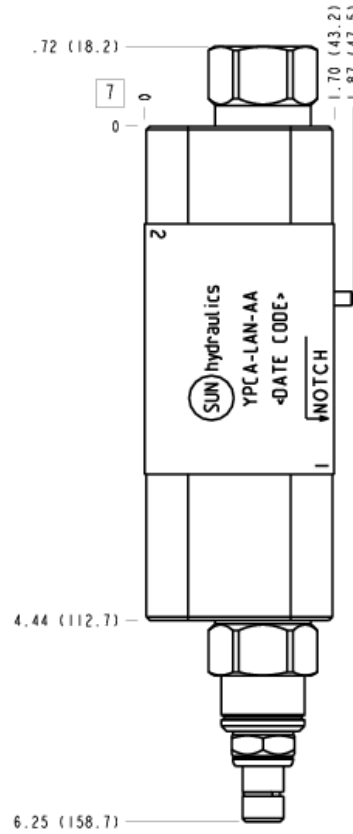

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Interface	ISO 03
Capacity	40 L/min.
Body Features	On A with reverse flow check
Seal Plate Included (see notes)	Yes
Stack Height	44,7 mm

OPTION SELECTION EXAMPLE: YPCALANAA

CONTROL		(L) ADJUSTMENT RANGE	(A) SEAL MATERIAL	(N)	
L	Standard Screw Adjustment	A	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting	N	Buna-N
C	Tamper Resistant - Factory Set	B	50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar) Standard Setting	V	Viton
J	Capped Screw Adjustment	C	150 - 6000 psi (10,5 - 420 bar), 200 psi (14 bar) Standard Setting		
K	manilla	D	25 - 800 psi (1,7 - 55 bar), 200 psi (14 bar) Standard Setting		
		E	25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting		
		N	60 - 800 psi (4 - 55 bar), 200 psi (14 bar) Standard Setting		

PRIMARY CARTRIDGE		(A)
A	A (with PBDB primary cartridge, Pilot-operated, reductor de presión válvula)	
A	A (with PBDB8 primary cartridge, Pilot-operated, reductor de presión módulo principal con cavidad de control T-8A integral)	


INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012*	O-Ring	4
700-002*	Seal Plate	1
811-001-006*	Pin	1
850-004-250*	Plug	2
CXDAXCN	Cartridge	1
PBDBLAN	Cartridge - Primary	1


MANIFOLD FACES
FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


FACE 2

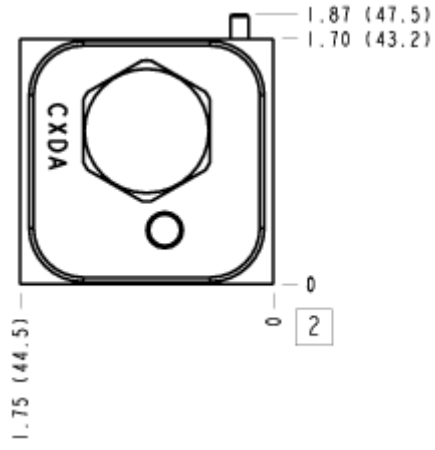


FACE 6

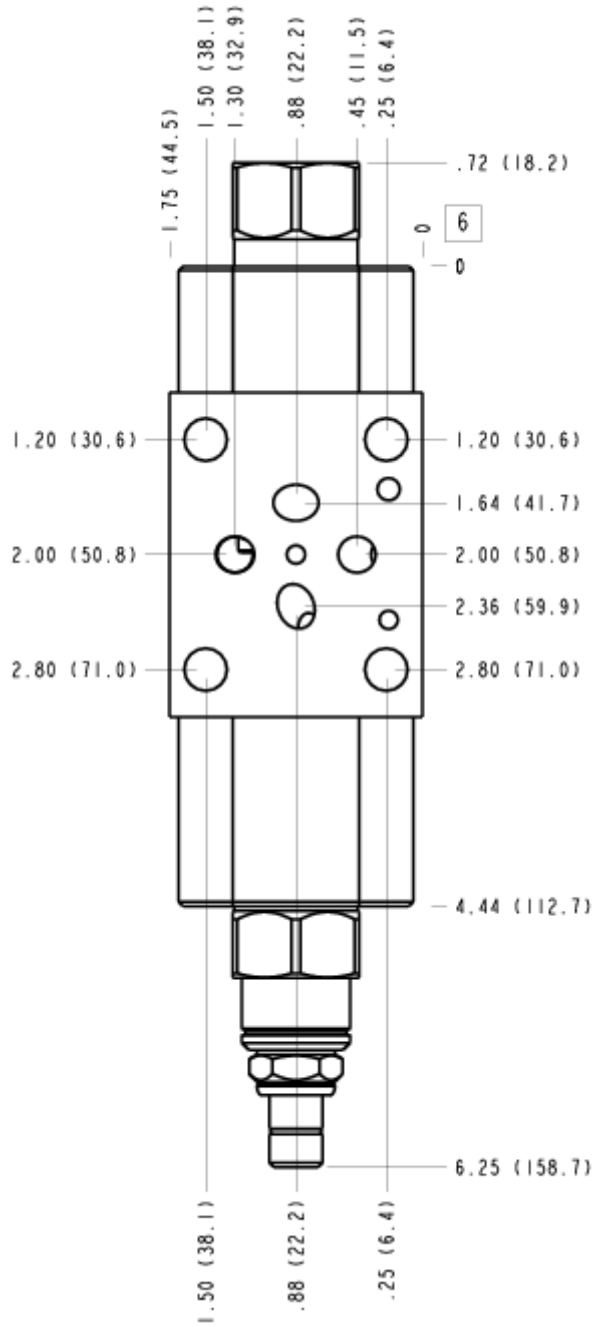

FACE 7

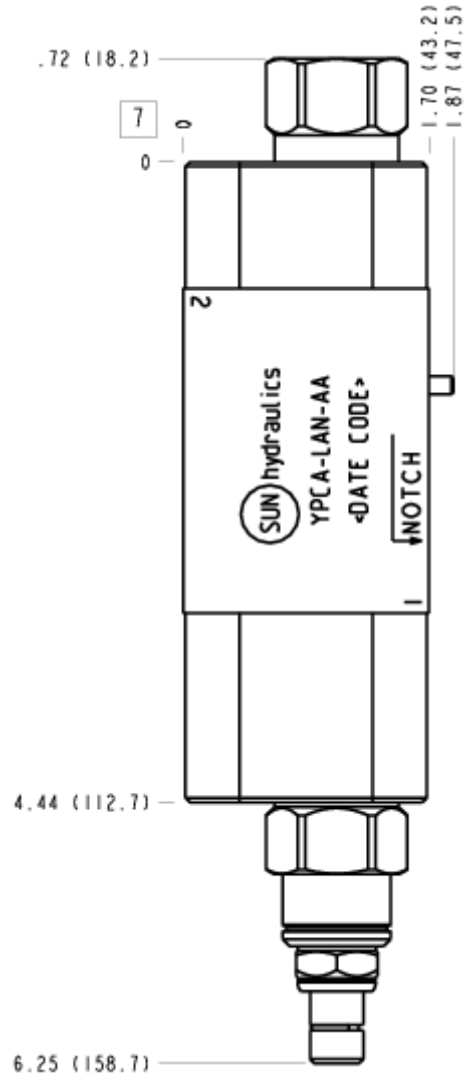

FACE 8

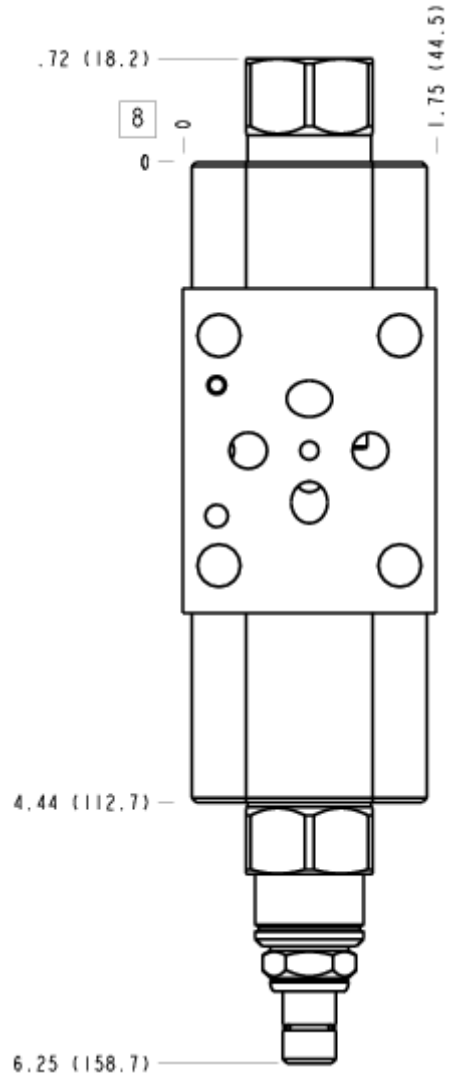

FACE 10

