


## CONFIGURATION

L Control	Standard Screw Adjustment
A Adjustment Range	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting
N Seal Material	Buna-N
A Primary Cartridge	A (with PBDB primary cartridge, Pilot-operated, reductor de presión válvula.)
A Port and Material Designation	A Aluminum

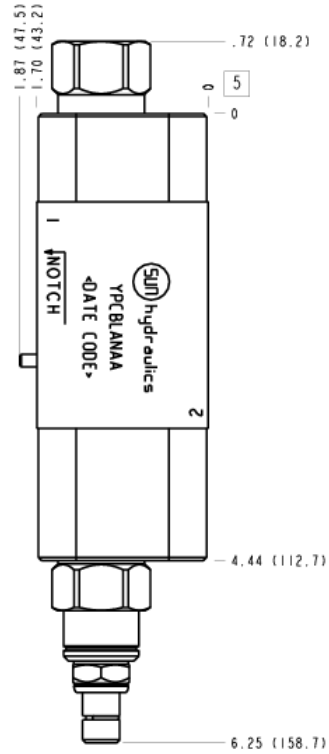

## TECHNICAL DATA

Body Type	apilables
Interface	ISO 03
Body Features	On B with free flow check
Seal Plate Included (see notes)	Yes
Stack Height	44,7 mm

**CONFIGURATION OPTIONS**

**Model Code Example: YPCBLANAA**

CONTROL	(L)	ADJUSTMENT RANGE	(A)	SEAL MATERIAL	(N)
<b>L</b>	Standard Screw Adjustment	<b>A</b>	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting	<b>N</b>	Buna-N
<b>C</b>	Tamper Resistant - Factory Set	<b>B</b>	50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar) Standard Setting	<b>V</b>	Viton
<b>J</b>	Capped Screw Adjustment	<b>C</b>	150 - 6000 psi (10,5 - 420 bar), 200 psi (14 bar) Standard Setting		
<b>K</b>	manilla	<b>D</b>	25 - 800 psi (1,7 - 55 bar), 200 psi (14 bar) Standard Setting		
		<b>E</b>	25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting		
		<b>N</b>	60 - 800 psi (4 - 55 bar), 200 psi (14 bar) Standard Setting		

**PRIMARY CARTRIDGE**

(A)

<b>A</b>	A (with PBDB primary cartridge, Pilot-operated, reductor de presión válvula )
A	A (with PBDB8 primary cartridge, Pilot-operated, reductor de presión módulo principal con cavidad de control T-8A integral )

**INCLUDED COMPONENTS**

Part	Description	Quantity
500-001-012*	O-Ring	4
700-002*	Seal Plate	1
811-001-006*	Pin	1
850-004-250*	Plug	2
CXDAXCN	Cartridge	1
PBDBLAN	Cartridge - Primary	1