


CONFIGURATION

L	
A	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar)
N	
A Primary Cartridge	A (with PBDB primary cartridge, ,)
A Port and Material Designation	A Aluminum

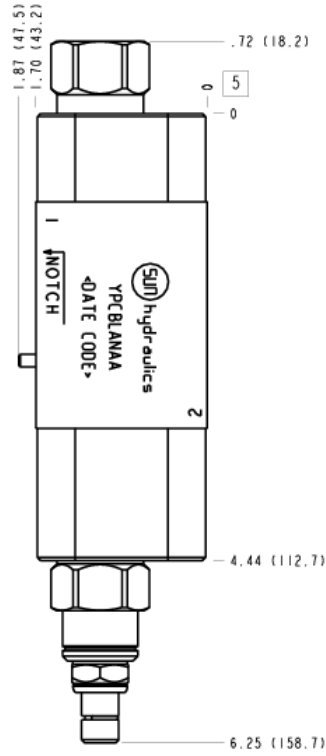

TECHNICAL DATA

	ISO 03
Stack Height	44,7 mm
()	
	On B with free flow check

CONFIGURATION OPTIONS

Model Code Example: YPCBLANAA

	(L)	(A)	(N)
L		A 100 - 3000 psi (7 - 210 bar), 200 psi (14 bar)	N
C	-		V
F		B 50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar)	
K		C 150 - 6000 psi (10,5 - 420 bar), 200 psi (14 bar)	
W		D 25 - 800 psi (1,7 - 55 bar), 200 psi (14 bar)	
Y		E 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar)	
		N 60 - 800 psi (4 - 55 bar), 200 psi (14 bar)	
		Q 60 - 400 psi (4 - 28 bar), 200 psi (14 bar)	
		W 150 - 4500 psi (10,5 - 315 bar), 200 psi (14 bar)	

PRIMARY CARTRIDGE

(A)

A	A (with PBDB primary cartridge, ,)
A	A (with PBDB8 primary cartridge, , T-8A)

INCLUDED COMPONENTS

Part	Description	Quantity
500-001-012*	O-Ring	4
700-002*	Seal Plate	1
811-001-006*	Pin	1
850-004-250*	Plug	2
CXDAXCN	Cartridge	1
PBDBLAN	Cartridge - Primary	1