


CONFIGURATION

L Control	Standard Screw Adjustment
A Adjustment Range	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting
N Seal Material	Buna-N
A Primary Cartridge	A (with PBDB primary cartridge, Pilot-operated, reductor de presión válvula.)
A Port and Material Designation	A Aluminum

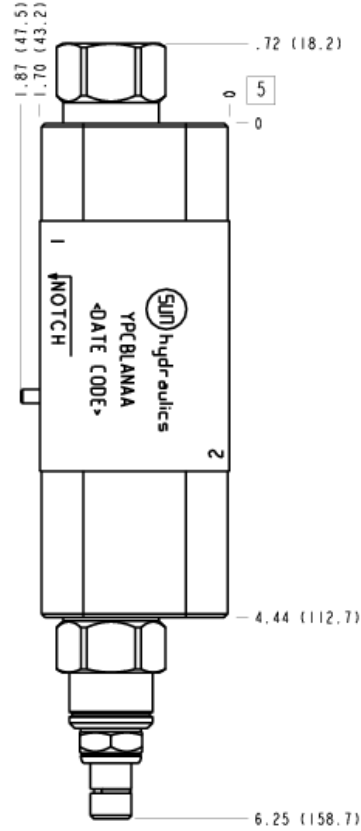

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Body Type	apilables
Interface	ISO 03
Capacity	40 L/min.
Body Features	On B with free flow check
Seal Plate Included (see notes)	Yes
Stack Height	44,7 mm

OPTION SELECTION EXAMPLE: YPCBLANAA

CONTROL	(L) ADJUSTMENT RANGE	(A) SEAL MATERIAL	(N)
L Standard Screw Adjustment	A 100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting	N Buna-N	
C Tamper Resistant - Factory Set	B 50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar) Standard Setting	V Viton	
J Capped Screw Adjustment	C 150 - 6000 psi (10,5 - 420 bar), 200 psi (14 bar) Standard Setting		
K manilla	D 25 - 800 psi (1,7 - 55 bar), 200 psi (14 bar) Standard Setting		
	E 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting		
	N 60 - 800 psi (4 - 55 bar), 200 psi (14 bar) Standard Setting		

PRIMARY CARTRIDGE (A)

A	A (with PBDB primary cartridge, Pilot-operated, reductor de presión válvula)
A	A (with PBDB8 primary cartridge, Pilot-operated, reductor de presión módulo principal con cavidad de control T-8A integral)

INCLUDED COMPONENTS


Part	Description	Quantity
500-001-012*	O-Ring	4
700-002*	Seal Plate	1
811-001-006*	Pin	1
850-004-250*	Plug	2
CXDAXCN	Cartridge	1
PBDBLAN	Cartridge - Primary	1

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


FACE 2

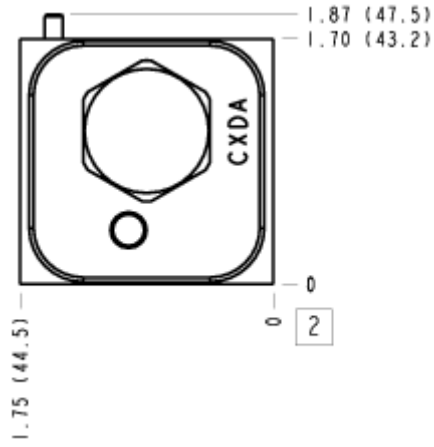


FACE 5

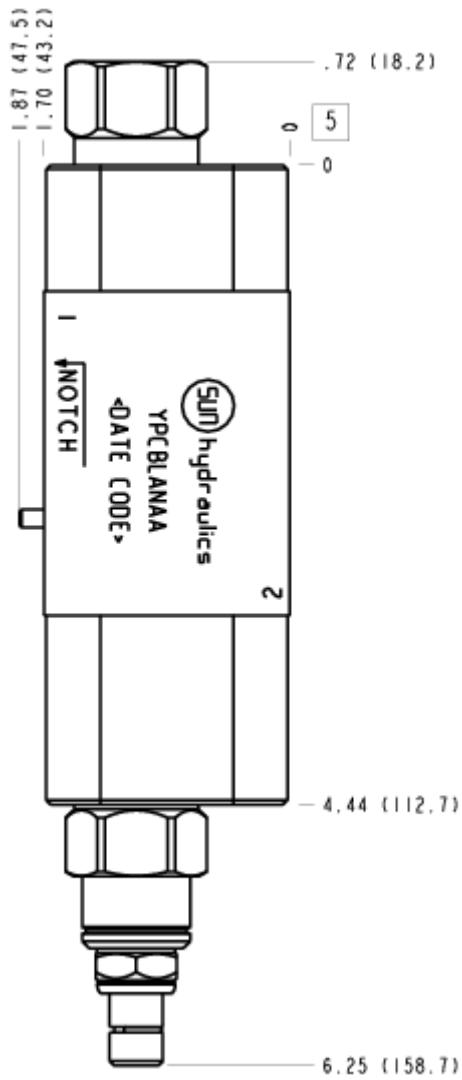


FACE 6

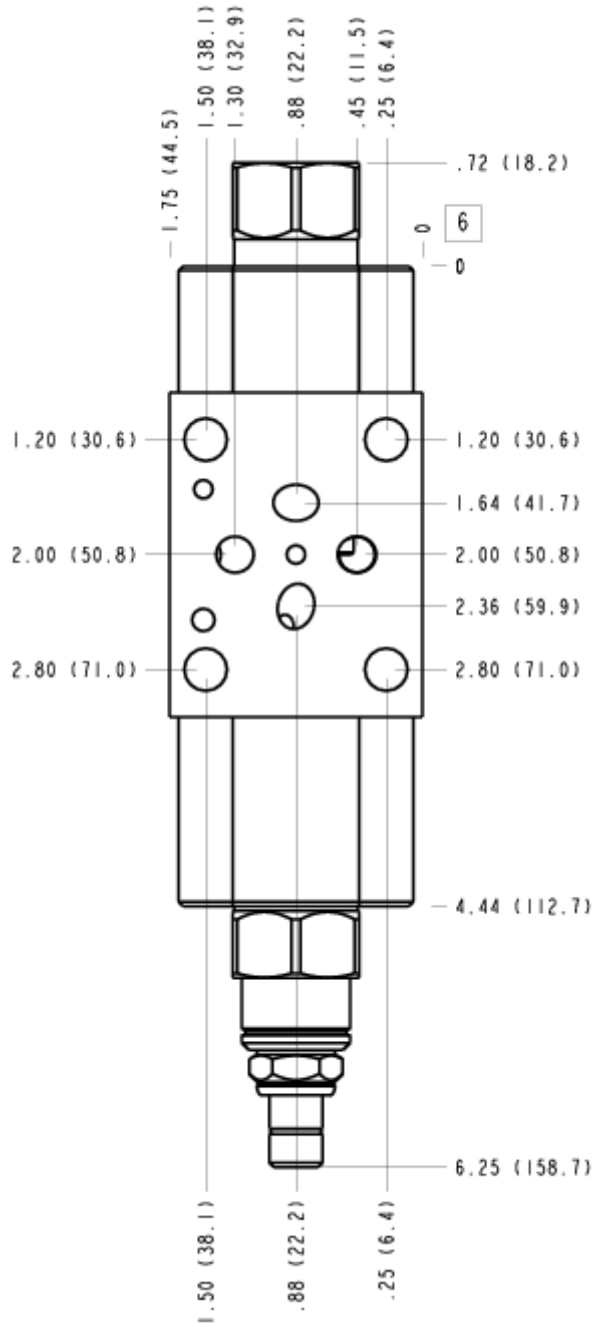

FACE 7

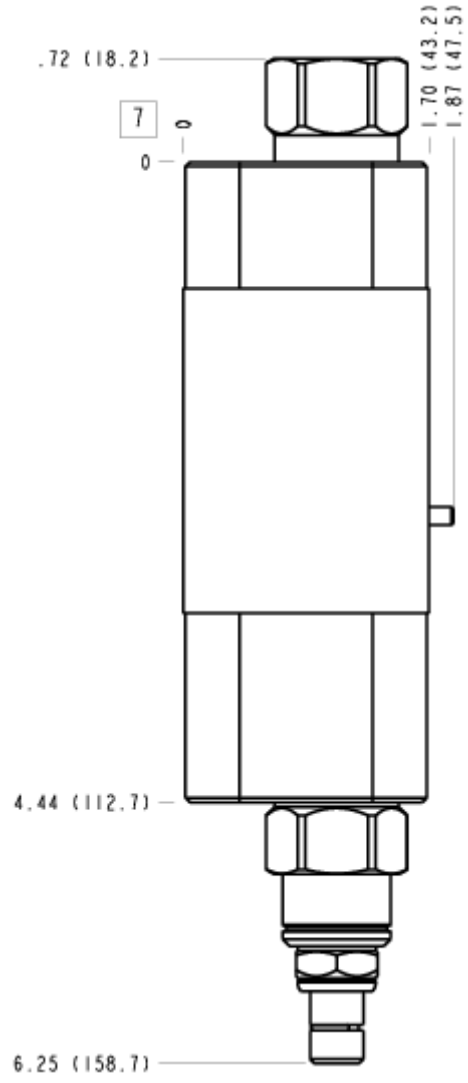

FACE 8

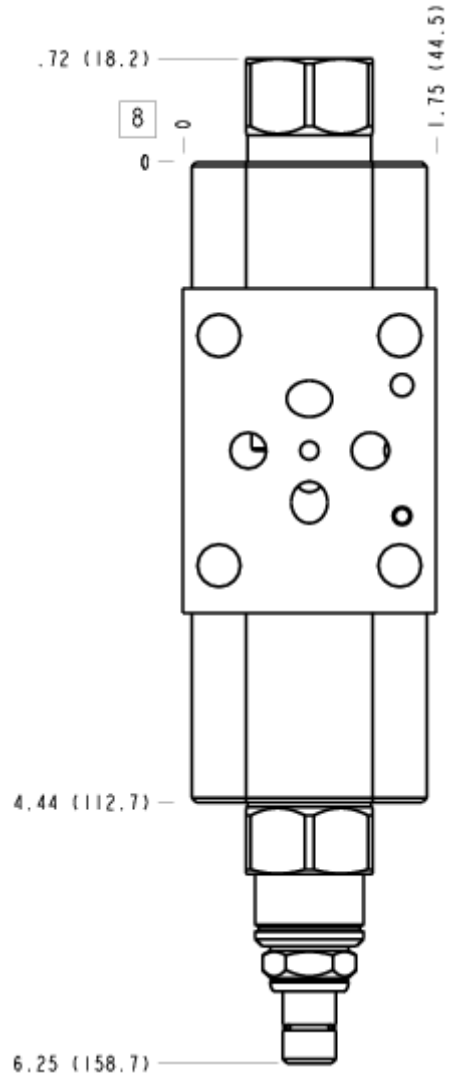

FACE 10

