


**CONFIGURATION**

L	
A	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar)
N	
A Primary Cartridge	A (with PPDB primary cartridge, / )
A Port and Material Designation	A Aluminum

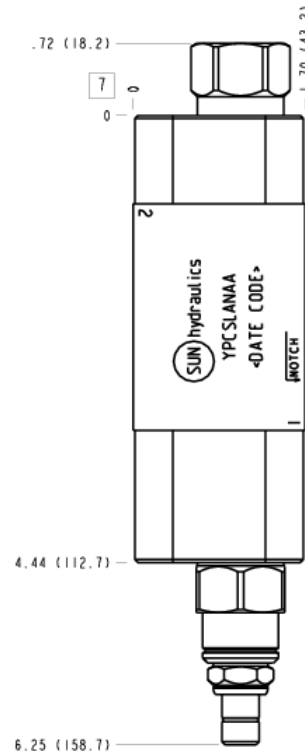

**TECHNICAL DATA**

	ISO 03
( )	
	A ,

**CONFIGURATION OPTIONS**

**Model Code Example: YPCSLANAA**

(L)

(A)

(N)

<b>L</b>	<b>A</b>	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar)	<b>N</b>
<b>C</b>			<b>V</b>
<b>K</b>	<b>B</b>	50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar)	
<b>W</b>	<b>C</b>	150 - 6000 psi (10,5 - 420 bar), 200 psi (14 bar)	
	<b>D</b>	25 - 800 psi (1,7 - 55 bar), 200 psi (14 bar)	
	<b>E</b>	25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar)	
	<b>N</b>	60 - 800 psi (4 - 55 bar), 200 psi (14 bar)	
	<b>Q</b>	60 - 400 psi (4 - 28 bar), 200 psi (14 bar)	
	<b>W</b>	150 - 4500 psi (10,5 - 315 bar), 200 psi (14 bar)	

**PRIMARY CARTRIDGE**

(A)

<b>A</b>	A (with PPDB primary cartridge, , / )
<b>A</b>	A (with PPDB8 primary cartridge, , / T-8A )

**INCLUDED COMPONENTS**

Part	Description	Quantity
500-001-012*	O-Ring	4
700-002*	Seal Plate	1
811-001-006*	Pin	1
850-004-250*	Plug	2
CXDAXCN	Cartridge	1
PPDBLAN	Cartridge - Primary	1