


[sunhydraulics.com/model/YPEL](http://sunhydraulics.com/model/YPEL)

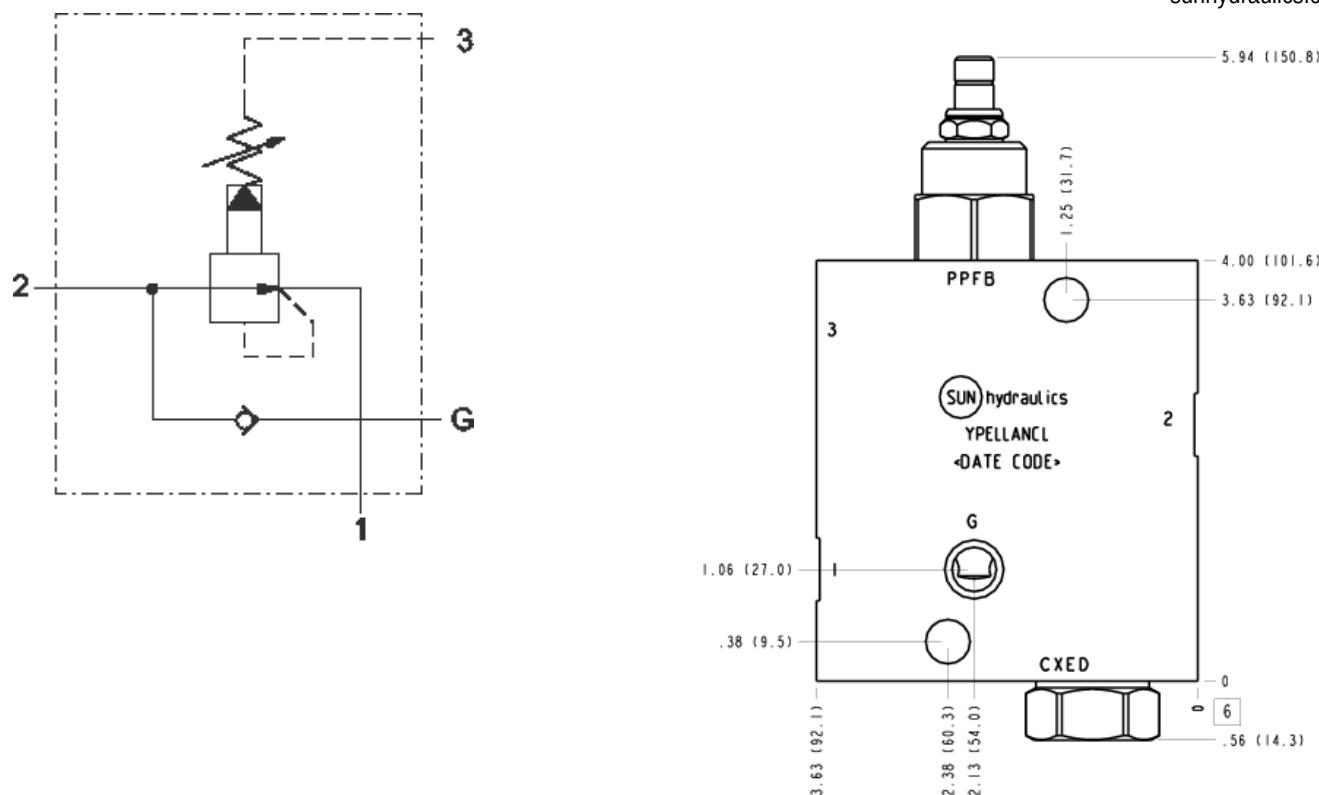

**MODELO  
YPEL**

Reductor/alivio de presión ensamblaje , con anti-retorno de caudal inverso  
**CAPACIDAD: 80 L/min.**

Continued from  
previous page

## CONFIGURATION OPTIONS

## Model Code Example: YPELLANCL

CONTROL	(L)	ADJUSTMENT RANGE	(A)	SEAL MATERIAL	(N)
L	Standard Screw Adjustment	A	100 - 3000 psi (7 - 210 bar), 200 psi (14 bar) Standard Setting	N	Buna-N
C	Tamper Resistant - Factory Set	B	50 - 1500 psi (3,5 - 105 bar), 200 psi (14 bar) Standard Setting	V	Viton
W	Hex Wrench Adjustment	D	25 - 800 psi (1,7 - 55 bar), 200 psi (14 bar) Standard Setting		
Y	manilla de tres agarres	E	25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) Standard Setting		
		N	60 - 800 psi (4 - 55 bar), 200 psi (14 bar) Standard Setting		
		Q	60 - 400 psi (4 - 28 bar), 200 psi (14 bar) Standard Setting		
		W	150 - 4500 psi (10,5 - 315 bar), 200 psi (14 bar) Standard Setting		

## PRIMARY CARTRIDGE

(C)

C	30 psi (2 bar) (with PPFB primary cartridge, Pilot-operated, reductor/alivio de presión válvula )
A	4 psi (0,3 bar) (with PPFB primary cartridge, Pilot-operated, reductor/alivio de presión válvula )
B	15 psi (1 bar) (with PPFB primary cartridge, Pilot-operated, reductor/alivio de presión válvula )
D	50 psi (3,5 bar) (with PPFB primary cartridge, Pilot-operated, reductor/alivio de presión válvula )
E	75 psi (5 bar) (with PPFB primary cartridge, Pilot-operated, reductor/alivio de presión válvula )
F	100 psi (7 bar) (with PPFB primary cartridge, Pilot-operated, reductor/alivio de presión válvula )
Z	1 psi (0,07 bar) (with PPFB primary cartridge, Pilot-operated, reductor/alivio de presión válvula )
Z	1 psi (0,07 bar) (with PPFB8 primary cartridge, Pilot-operated, reductor/alivio de presión módulo principal con cavidad de control T-8A integral )
F	100 psi (7 bar) (with PPFB8 primary cartridge, Pilot-operated, reductor/alivio de presión módulo principal con cavidad de control T-8A integral )
E	75 psi (5 bar) (with PPFB8 primary cartridge, Pilot-operated, reductor/alivio de presión módulo principal con cavidad de control T-8A integral )
D	50 psi (3,5 bar) (with PPFB8 primary cartridge, Pilot-operated, reductor/alivio de presión módulo principal con cavidad de control T-8A integral )
C	30 psi (2 bar) (with PPFB8 primary cartridge, Pilot-operated, reductor/alivio de presión módulo principal con cavidad de control T-8A integral )
B	15 psi (1 bar) (with PPFB8 primary cartridge, Pilot-operated, reductor/alivio de presión módulo principal con cavidad de control T-8A integral )
A	4 psi (0,3 bar) (with PPFB8 primary cartridge, Pilot-operated, reductor/alivio de presión módulo principal con cavidad de control T-8A integral )

## INCLUDED COMPONENTS

Part	Description	Quantity
CXEDXCN	Cartridge	1
PPFBLAN	Cartridge - Primary	1