


CONFIGURATION

L Control	Standard Screw Adjustment
A Adjustment Range	100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar) Standard Setting
N Seal Material	Buna-N
A Primary Cartridge	A (with SQDB primary cartridge, Tirar-abajo, pilot-operated, pistón balanceado secuencia válvula)
A Port and Material Designation	A Aluminum

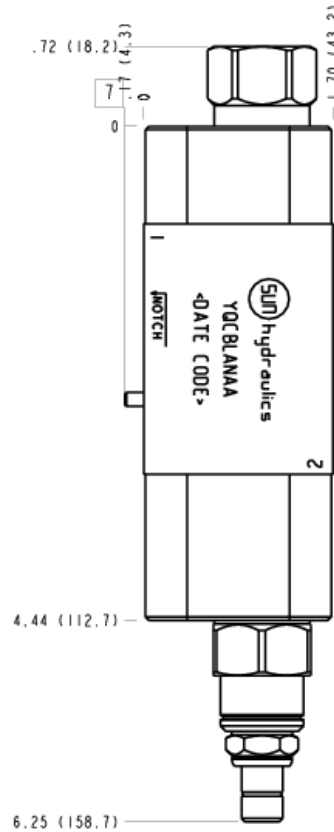

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Capacity	60 L/min.
----------	-----------

OPTION SELECTION EXAMPLE: YQCBLANAA

CONTROL	(L) ADJUSTMENT RANGE	(A) SEAL MATERIAL	(N)
L Standard Screw Adjustment	A 100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar) Standard Setting	N Buna-N	
		V Viton	

PRIMARY CARTRIDGE (A)

A A (with SQDB primary cartridge, Tirar-abajo, pilot-operated, pistón balanceado secuencia válvula)

INCLUDED COMPONENTS


Part	Description	Quantity
500-001-012*	O-Ring	4
700-002*	Seal Plate	1
811-001-006*	Pin	1
850-004-250*	Plug	2
CXCDXCN	Cartridge	1
SQDBLAN	Cartridge - Primary	1

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


FACE 2

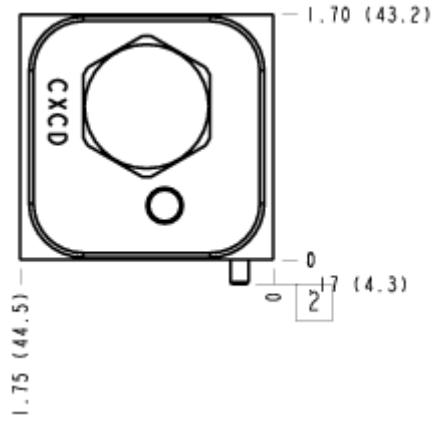


FACE 6

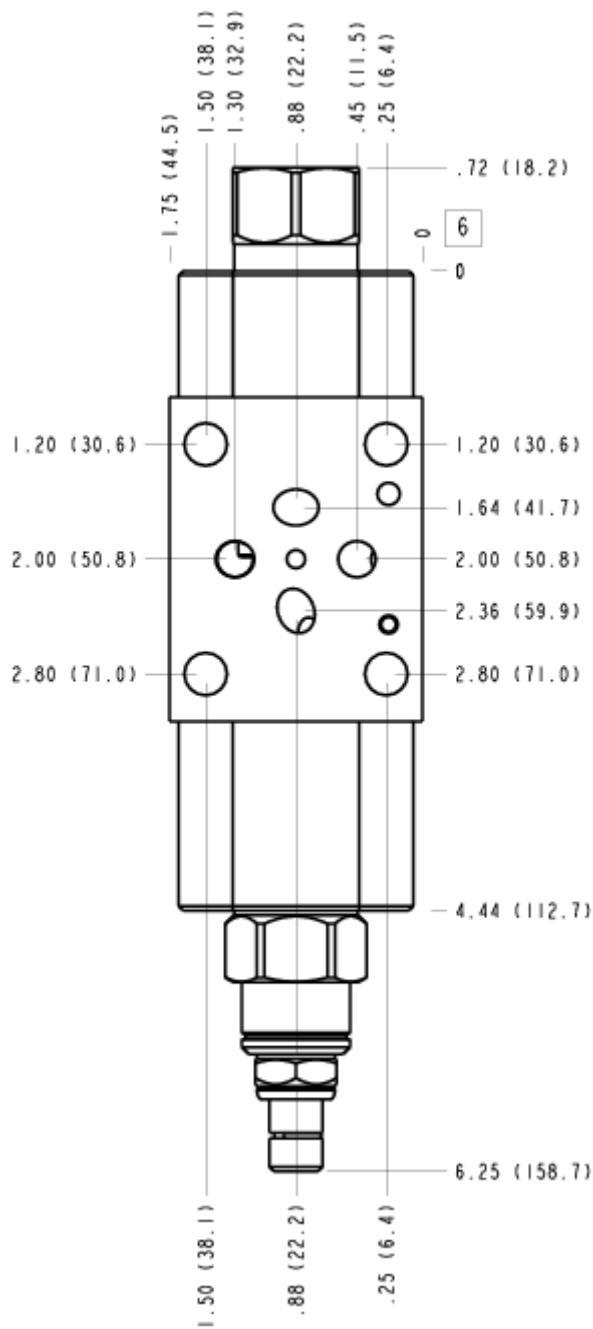

FACE 7

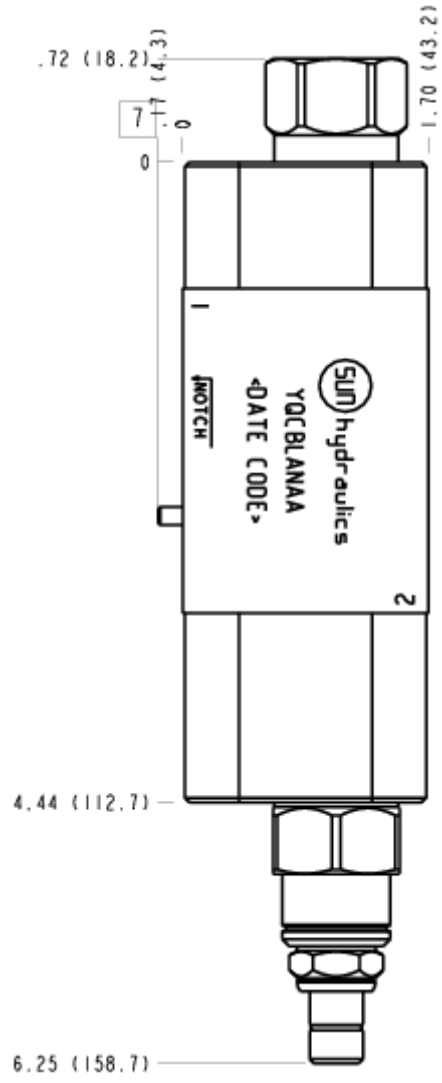

FACE 8

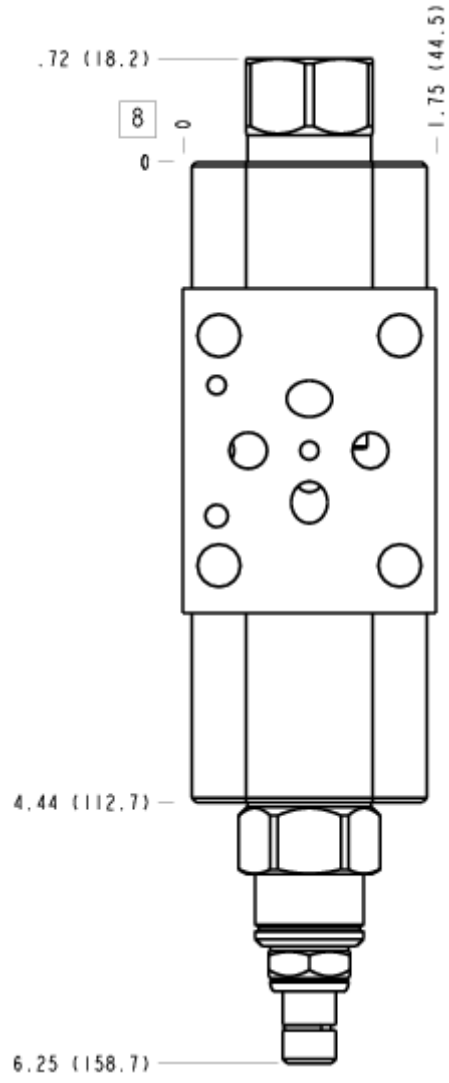

FACE 10

