


sunhydraulics.com/model/YSEP**TECHNICAL DATA**

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Body Type	montaje en línea
Capacity	120 L/min.
Mounting Hole Diameter	10,7 mm
Mounting Hole Depth	Through
Mounting Hole Quantity	2

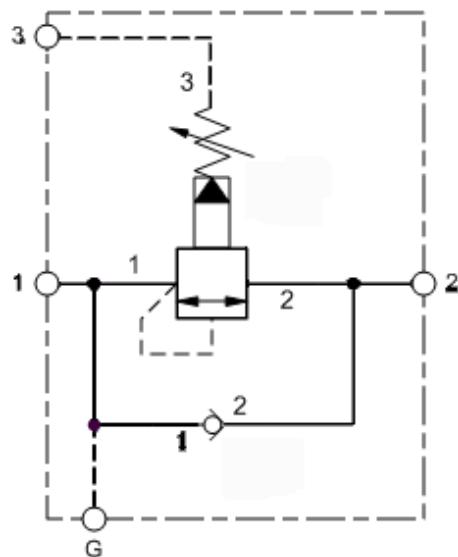

**MODELO
YSEP**

Secuencia ensamblaje con anti-retorno de caudal inverso
CAPACIDAD: 120 L/min.

Continued from
previous page

OPTION SELECTION EXAMPLE: YSEPLANCJ

CONTROL	(L) ADJUSTMENT RANGE	(A) SEAL MATERIAL	(N)
L Standard Screw Adjustment	A 100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar) Standard Setting	N Buna-N V Viton	

PRIMARY CARTRIDGE

(C)

C	30 psi (2 bar) (with RSFC primary cartridge, Pilot-operated, pistón balanceado secuencia válvula)
A	4 psi (0,3 bar) (with RSFC primary cartridge, Pilot-operated, pistón balanceado secuencia válvula)
B	15 psi (1 bar) (with RSFC primary cartridge, Pilot-operated, pistón balanceado secuencia válvula)
D	50 psi (3,5 bar) (with RSFC primary cartridge, Pilot-operated, pistón balanceado secuencia válvula)
E	75 psi (5 bar) (with RSFC primary cartridge, Pilot-operated, pistón balanceado secuencia válvula)
F	100 psi (7 bar) (with RSFC primary cartridge, Pilot-operated, pistón balanceado secuencia válvula)
Z	1 psi (0,07 bar) (with RSFC primary cartridge, Pilot-operated, pistón balanceado secuencia válvula)
Z	1 psi (0,07 bar) (with RSFC8 primary cartridge, Pilot-operated, pistón balanceado secuencia módulo principal con cavidad de control T-8A integral)
F	100 psi (7 bar) (with RSFC8 primary cartridge, Pilot-operated, pistón balanceado secuencia módulo principal con cavidad de control T-8A integral)
E	75 psi (5 bar) (with RSFC8 primary cartridge, Pilot-operated, pistón balanceado secuencia módulo principal con cavidad de control T-8A integral)
D	50 psi (3,5 bar) (with RSFC8 primary cartridge, Pilot-operated, pistón balanceado secuencia módulo principal con cavidad de control T-8A integral)
C	30 psi (2 bar) (with RSFC8 primary cartridge, Pilot-operated, pistón balanceado secuencia módulo principal con cavidad de control T-8A integral)
B	15 psi (1 bar) (with RSFC8 primary cartridge, Pilot-operated, pistón balanceado secuencia módulo principal con cavidad de control T-8A integral)
A	4 psi (0,3 bar) (with RSFC8 primary cartridge, Pilot-operated, pistón balanceado secuencia módulo principal con cavidad de control T-8A integral)

INCLUDED COMPONENTS

Part	Description	Quantity
CXFAXCN	Cartridge	1
RSFCLAN	Cartridge - Primary	1