


CONFIGURATION

X Control	Not Adjustable
C Cracking Pressure	30 psi (2 bar)
N Seal Material	Buna-N
Material/Coating	

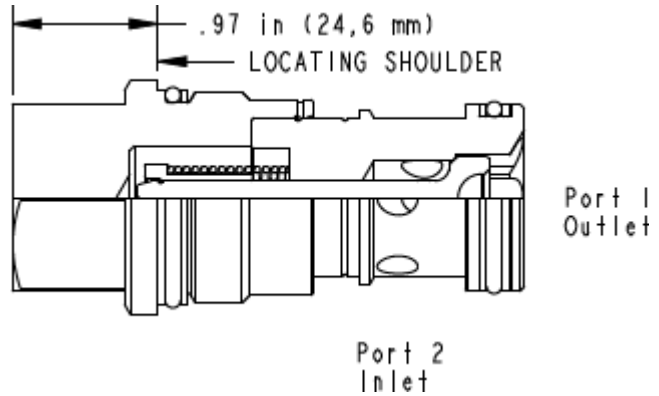

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

cavidad	T-16A
Series	3
Capacity	240 L/min.
Maximum Operating Pressure	350 bar
Maximum Valve Leakage at 110 SUS (24 cSt)	0,07 cc/min.
Valve Hex Size	31,8 mm
Valve Installation Torque	203 - 217 Nm
Model Weight	0.46 kg.
Seal kit - Cartridge	Buna: 990-016-007
Seal kit - Cartridge	EPDM: 990-016-014
Seal kit - Cartridge	Polyurethane: 990-016-002
Seal kit - Cartridge	Viton: 990-016-006
Seal kit - Cartridge	Buna: 990-016-007
Seal kit - Cartridge	EPDM: 990-016-014
Seal kit - Cartridge	Polyurethane: 990-016-002
Seal kit - Cartridge	Viton: 990-016-006

OPTION SELECTION EXAMPLE: CXGDXCN

CONTROL	(X) CRACKING PRESSURE	(C) SEAL MATERIAL	(N) MATERIAL/COATING
X Not Adjustable	C 30 psi (2 bar)	N Buna-N	/LH Mild Steel, Zinc-Nickel
L activador manual	F 100 psi (7 bar)	E EPDM	/AP Stainless Steel, Passivated
	Z 1 psi (0,07 bar)	V Viton	Standard Material/Coating

PERFORMANCE CURVES

