


CONFIGURATION

- L _____
- _____
- _____
- _____

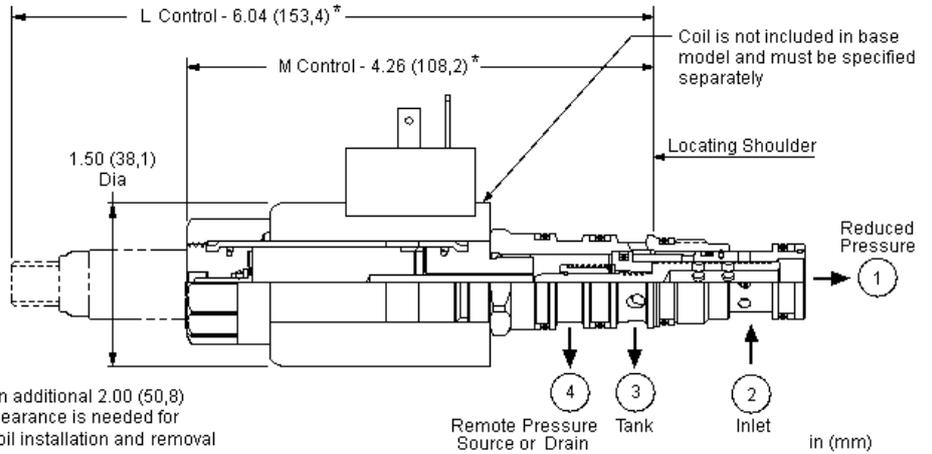

2 1 1 3 2

PROPORTIONAL PERFORMANCE DATA

	6%
	<8%
	<2%
()	<2%
	140 Hz
Seal and nut kit - Coil	Viton: 990-770-006
Seal kit - Cartridge	Buna: 990-021-007
Seal kit - Cartridge	Polyurethane: 990-021-002
Seal kit - Cartridge	Viton: 990-021-006

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

	T-21A
	1
	20 L/min.
	350 bar
110 SUS (24 cSt)	330 cc/min.
	5
	19 mm
	22,2 mm
	41 - 47 Nm
	4 mm
	15 mm
	9 - 10 Nm
	0,55 kg

OPTION SELECTION EXAMPLE: PSDLLMDN

	(L)	(S)	(V)	
L	S 10 - 100 psi (0,7 - 7 bar)	V	212	DIN 43650 A 12 VDC
M ()	B 100 - 1125 psi (7 - 77,5 bar)	N	224	DIN 43650 A 24 VDC
	D 50 - 485 psi (3,5 - 33,5 bar)		224NX01	DIN 43650 A 24 VDC (TVS) XMD-01
	E 25 - 250 psi (1,7 - 18 bar)		224NX02	DIN 43650 A 24 VDC (TVS) XMD-02
			912	Deutsch DT04-2P 12 VDC
			912NX01	Deutsch DT04-2P 12 VDC (TVS) XMD-01
			912NX02	Deutsch DT04-2P 12 VDC (TVS) XMD-02
			924	Deutsch DT04-2P 24 VDC
			924NX01	Deutsch DT04-2P 24 VDC (TVS) XMD-01
			924NX02	Deutsch DT04-2P 24 VDC (TVS) XMD-02

TECHNICAL FEATURES

- 3 3000 psi (210 bar)
- 5000 psi (350 bar)
-
- 4 1:1 5000 psi 350 bar
- 3 2000 psi (140 bar)
- 0.1 gpm(0,4 L/)
- 100-250 HZ
- 1 2
- "L K"
- "L K"
- 4
- Sun /

PERFORMANCE CURVES

