

CONFIGURATION

L	
A	100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar)
N	
Material/Coating	

1

TECHNICAL DATA

NOTE:

	T-2A	DATA
	2	MAY
	120 L/min.	VARY
	350 bar	BY
110 SUS (24 cSt)	50 cc/min.@70 bar	
	15 L/min.	
	0,16 - 0,25 L/min.	
	10 ms	
-	5	
	28,6 mm	
	61 - 68 Nm	
	4 mm	
	15 mm	
	9 - 10 Nm	
	0.29 kg.	
Seal kit - Cartridge	Buna: 990-202-007	
Seal kit - Cartridge	EPDM: 990-202-014	
Seal kit - Cartridge	Polyurethane: 990-002-002	
Seal kit - Cartridge	Viton: 990-202-006	

: • O 1 0.75 in. (19 mm)

CONFIGURATION. SEE CONFIGURATION SECTION.




OPTION SELECTION EXAMPLE: RVEALAN

	(L)	(A)	(N)	MATERIAL/COATING	(/LH)
L		A 100 - 3000 psi (7 - 210 bar), 1000 psi (70 bar)	N	/LH	-
C	-		E EPDM	/AP	
Y		B 50 - 1500 psi (3,5 - 105 bar), 1000 psi (70 bar) C 150 - 6000 psi (10,5 - 420 bar), 1000 psi (70 bar) D 25 - 800 psi (1,7 - 55 bar), 400 psi (28 bar) E 25 - 400 psi (1,7 - 28 bar), 200 psi (14 bar) J 25 - 1500 psi (1,7 - 105 bar), 1000 psi (70 bar) K 75 - 1500 psi (5 - 105 bar), 1000 psi (70 bar) N 60 - 800 psi (4 - 55 bar), 400 psi (28 bar) Q 60 - 400 psi (4 - 28 bar), 200 psi (14 bar) S 25 - 200 psi (1,7 - 14 bar), 100 psi (7 bar) W 150 - 4500 psi (10,5 - 315 bar), 1000 psi (70 bar)	V		Standard Material/Coating

TECHNICAL FEATURES

- 3
- 2
- 150
-
- 2 1:1
- EPDM
- Sun /

PERFORMANCE CURVES

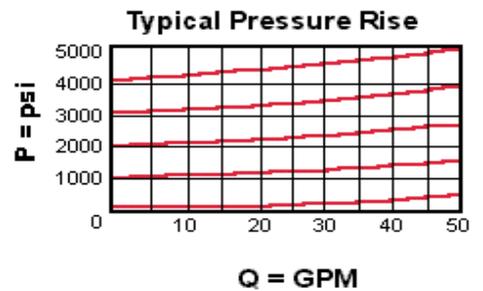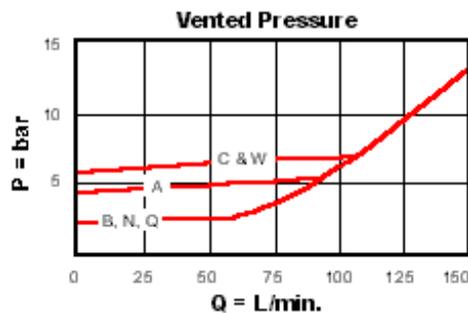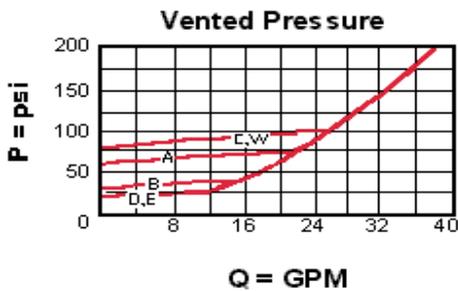

Typical Pressure Rise

