

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Body Type	montaje en línea
Capacity	60 L/min.
Control Flow Range	.2 - 6 gpm
Mounting Hole Quantity	2

OPTION SELECTION EXAMPLE: XQCKLANBK

CONTROL	(L) ADJUSTMENT RANGE	(A) SEAL MATERIAL	(N)
L Standard Screw Adjustment	A 1000 - 3000 psi (70 - 210 bar), 1000 psi (70 bar) Standard Setting	N Buna-N	
C Tamper Resistant - Factory Set		V Viton	
K manilla			

PRIMARY CARTRIDGE	(B)
B 20% (with QCDB primary cartridge, 20%, detector de presión en el acumulador, descargador de bomba válvula con anti-retorno - capacidad de pilotaje)	
E 10% (with QCDE primary cartridge, 10%, detector de presión en el acumulador, descargador de bomba válvula con anti-retorno - capacidad de pilotaje)	
D 50% (with QCDD primary cartridge, 50%, detector de presión en el acumulador, descargador de bomba válvula con anti-retorno - capacidad de pilotaje)	
C 30% (with QCDC primary cartridge, 30%, detector de presión en el acumulador, descargador de bomba válvula con anti-retorno - capacidad de pilotaje)	
A 15% (with QCDA primary cartridge, 15%, detector de presión en el acumulador, descargador de bomba válvula con anti-retorno - capacidad de pilotaje)	

INCLUDED COMPONENTS


Part	Description	Quantity
A330-006-004*	SAE Plug	1
A330-006-006*	SAE Plug	1
A330-006-012*	SAE Plug	1
COFOXDN	Cartridge	1
FVCAXAN	Cartridge	1
LPBDXDN	Cartridge	1
QCDBLAN	Cartridge - Primary	1
RDDFXAN	Cartridge	1

MANIFOLD FACES


FACE GRID

1	2	3	4
5	6	7	8
9	10	11	12


FACE 2

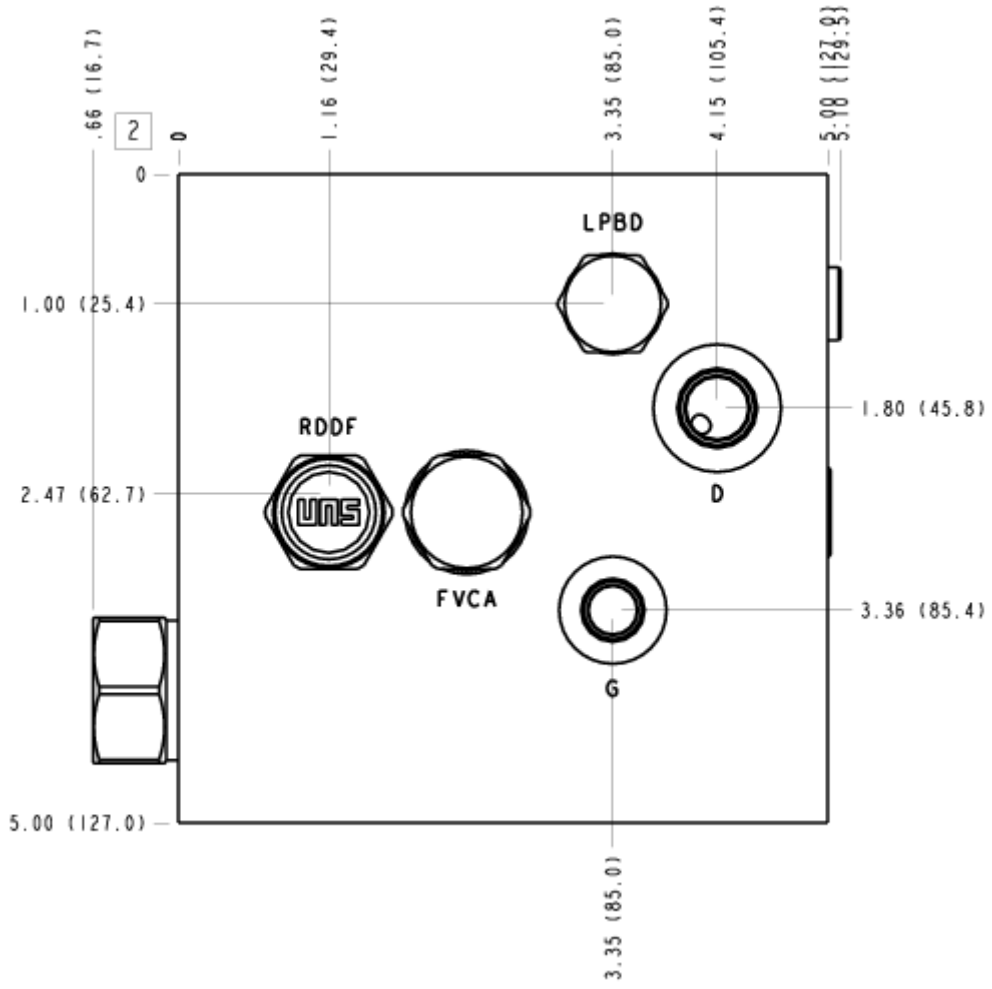


FACE 5

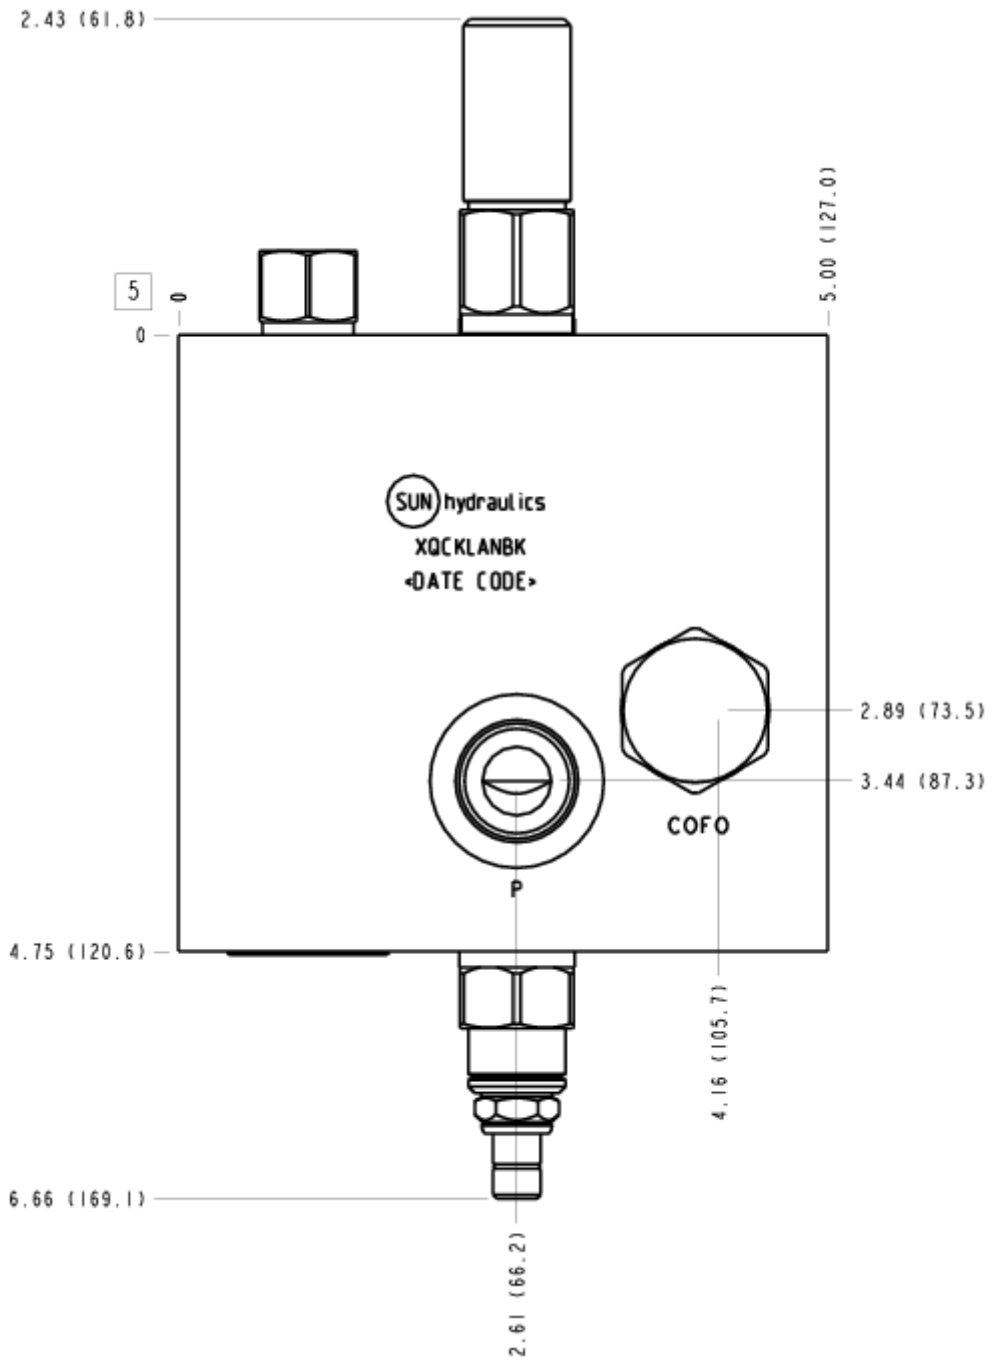

FACE 6

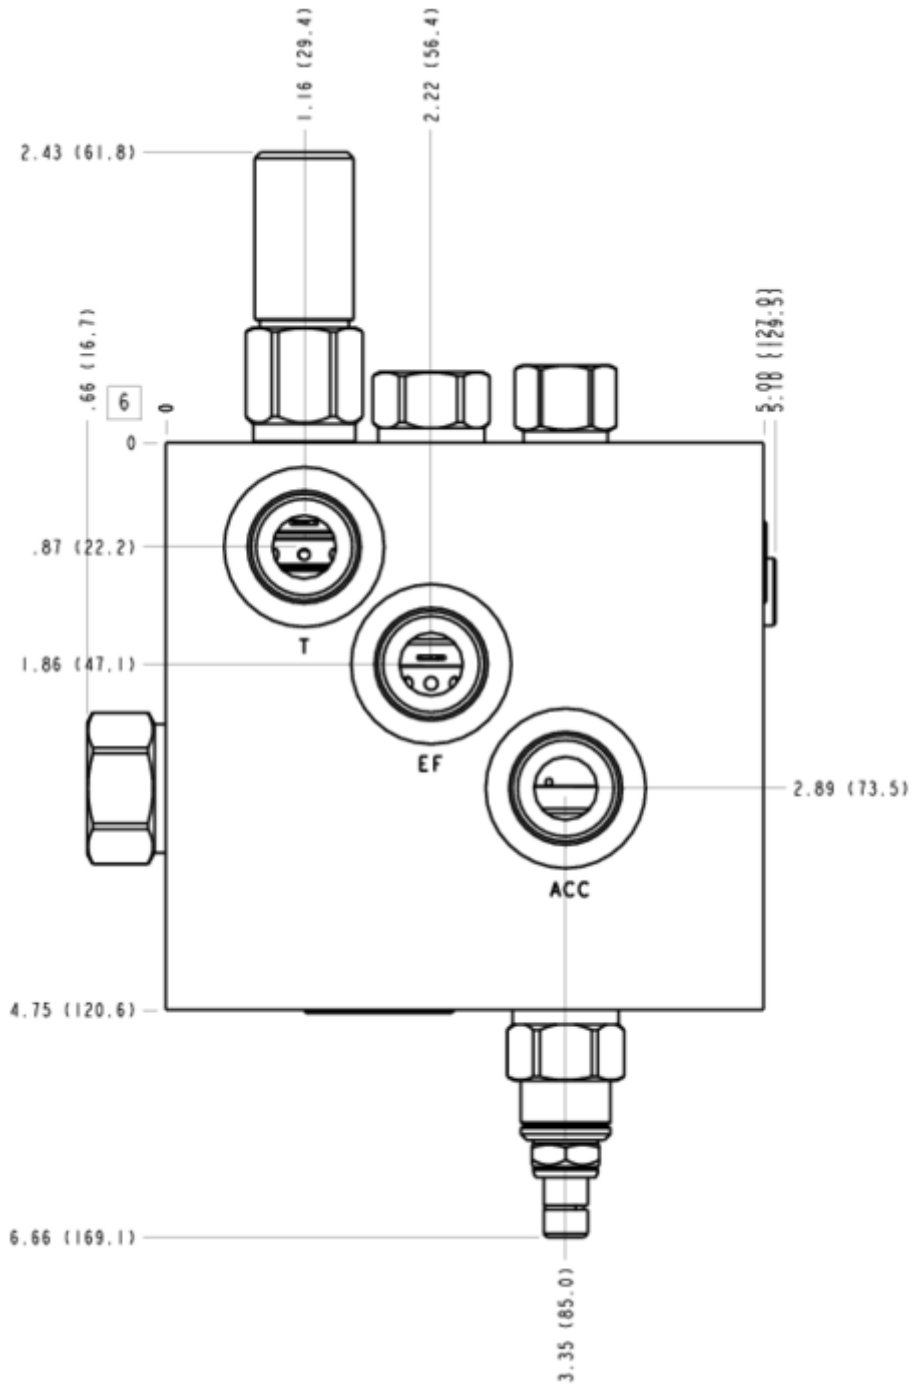

FACE 7

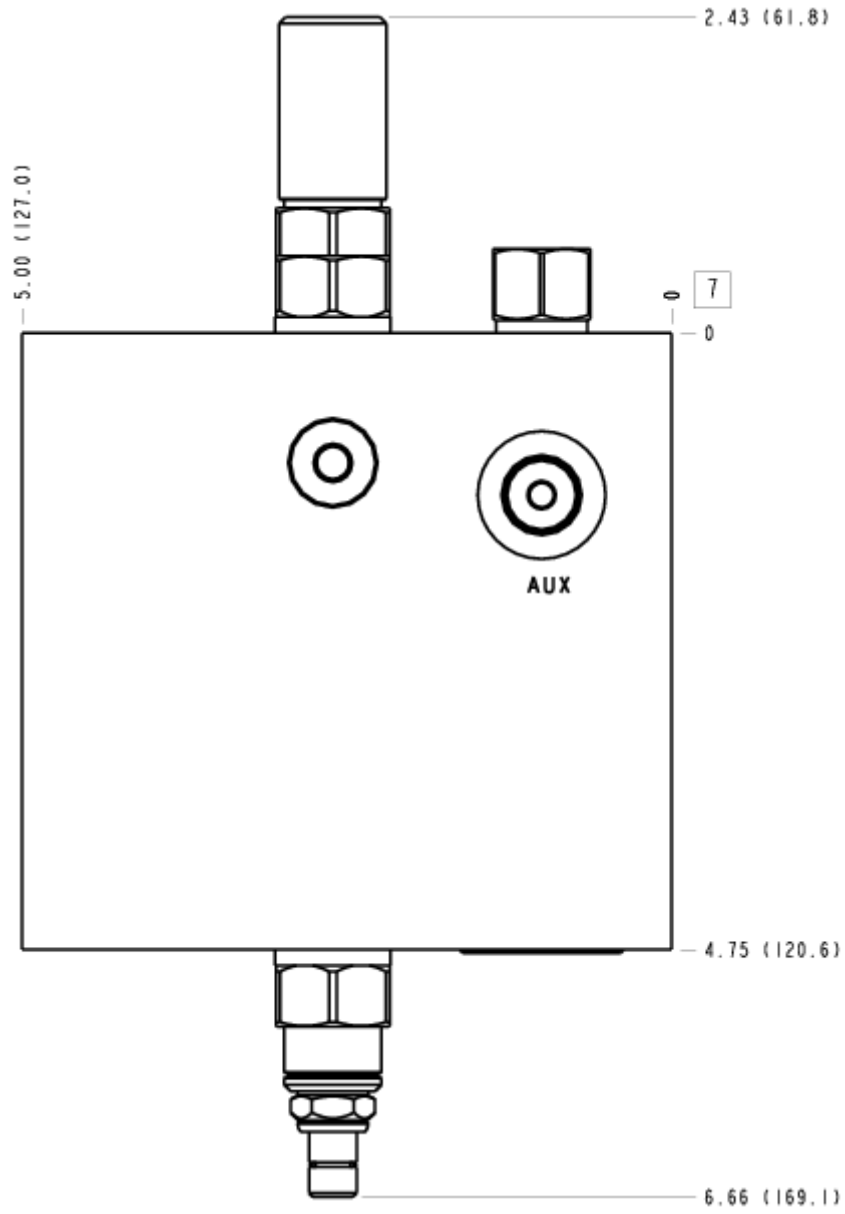

FACE 10

