

CAPACITY: 20 gpm



sunhydraulics.com/model/XQEG



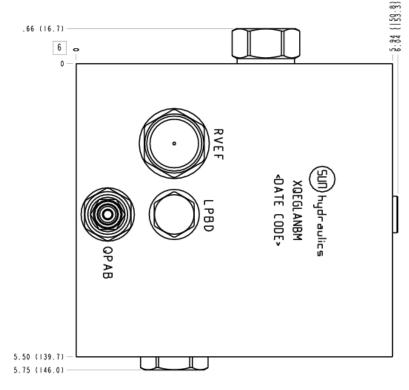

This valve assembly is meant to charge an accumulator using a fixed displacement pump. When the pressure reaches the set point of the valve, the pump is unloaded. When the pressure drops to the value determined by the fixed percentage of the pilot valve, the pump is brought back on line to recharge the accumulator. The ventable relief serves a dual purpose as a main stage to unload the pump and as a system over-pressure relief. The assembly has two additional features; a simple circuit that softens the unloading of the pump and provisions for remote sensing of the accumulator pressure.

TECHNICAL DATA NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Body Type	Line mount
Check Cracking Pressure	50 psi
Mounting Hole Diameter	.41 in.
Mounting Hole Depth	Through
Mounting Hole Quantity	2

NOTES: • *Important:* Carefully consider the maximum system pressure. The pressure rating of the manifold is dependent on the manifold material, with the port type/size a secondary consideration. Manifolds constructed of aluminum are not rated for pressures higher than 3000 psi (210 bar), regardless of the port type/size specified.

• For detailed information regarding the cartridges contained in this assembly, click on the models codes shown in the Included Components tab.

©2024 Sun Hydraulics 1 of 2





Accumulator sense, pump unload assembly with bleed down

CAPACITY: 20 gpm

Continued from previous page

CONFIGURATION OPTIONS

Model Code Example: XQEGLANBM

CONTROL (L) ADJUSTMENT RANGE (A) SEAL MATERIAL (N)

. Standard Screw Adjustment

1000 - 3000 psi (70 - 210 bar), 1000 psi (70 bar) Standard Setting

N Buna-N V Viton

PRIMARY CARTRIDGE

(B)

В	20% (with QPAB primary cartridge, 20%, accumulator sense, pump unload valve - pilot capacity)
E	10% (with QPAE primary cartridge, 10%, accumulator sense, pump unload valve - pilot capacity)
D	50% (with QPAD primary cartridge, 50%, accumulator sense, pump unload valve - pilot capacity)
С	30% (with QPAC primary cartridge, 30%, accumulator sense, pump unload valve - pilot capacity)
Α	15% (with QPAA primary cartridge, 15%, accumulator sense, pump unload valve - pilot capacity)

INCLUDED COMPONENTS

Part	Description	Quantity
A330-006-006*	SAE Plug	1
A330-006-012*	SAE Plug	1
COFOXDN	Cartridge	1
CXFAXCN	Cartridge	1
LPBDXFN	Cartridge	1
QPABLAN	Cartridge - Primary	1
RVEFXAN	Cartridge	1

©2024 Sun Hydraulics 2 of 2